

Specifications:

Material And Finish:

Insulator:High temperature themoplastic

Contact:Brass

Plated:See Ordering Information

Rating:

Current—Maximum per contact:4.0 Amp(22AWG)

Voltage—Maximum 500V DC










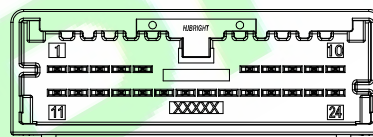
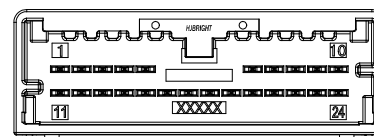
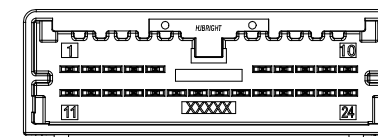
Operating Temperature Range:−40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:1000V AC/Minute

12 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION A TYPE COLOR:BLACK12 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION B TYPE COLOR:GRAY12 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION C TYPE COLOR:DARK GRAY16 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION A TYPE COLOR:DARK BLACK16 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION B TYPE COLOR:GRAY16 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION C TYPE COLOR:DARK GRAY20 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION A TYPE COLOR:DARK BLACK20 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION B TYPE COLOR:GRAY20 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION C TYPE COLOR:DARK GRAY24 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION A TYPE COLOR:DARK BLACK24 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION B TYPE COLOR:GRAY24 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION C TYPE COLOR:DARK GRAY

Ordering Information

A20062S-XXS-XC

1 2 3 4 5 6

1:—Series No.

2:—S:Straight Type

3:—No. of Positions

4:—S: Matte Tin Plated

5:—Polarization OPTION:

A: A TYPE Color:Balck

B: B TYPE Color:Gray

C: C TYPE Color:Drak Gray

6:—A:In bag

C:In Tray

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : A20062S-XXS-XC
	LINEAR	ANGLES	
	X.: ±0.30	X': ±5.0°	DWG. NO.:
	X.X: ±0.20	X.X': ±3.0°	
	X.XX: ±0.15	X.XX': ±2.0°	TITLE : MINI50 STRAIGHT DUAL ROW ASSEMBLY SALES DRAWING(12~24P)
CHKD.: Aren	X.XXX: ±0.05	X.XXX': ±1.0°	
APPD.: Billy	DATE: 24-Jun-2019		

HJBRIGHT® 东莞市華晶电子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/3

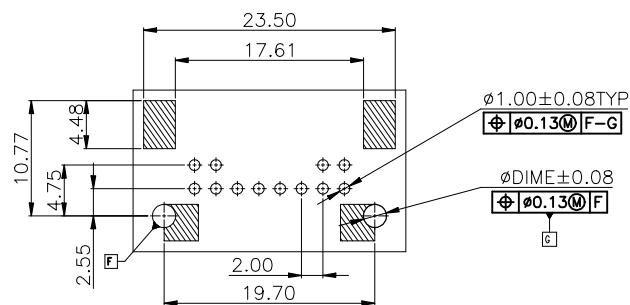
SCALE: 1:1

UNIT: mm




THIRD ANGLE PROJECTION


A4




12 CIRCUIT

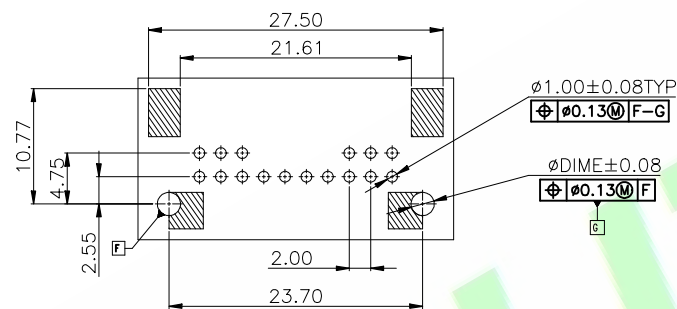


16 CIRCUIT

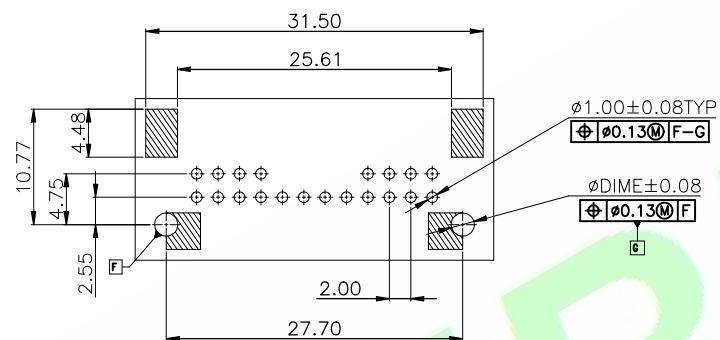

20 CIRCUIT

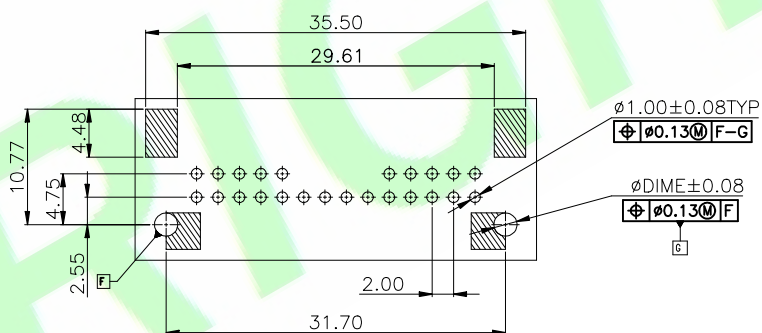


24 CIRCUIT



POST HOLE TABLE	
	DM E
PRESS FIT	2.15
DROP IN	2.55

PCB LAYOUT
BOARD SHOWN FOR REFERENCE ONLY

				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : A20062S-XXS-XC		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
					LINEAR	ANGLES	DWG. NO.:					
				CHKD.: Aren	x.: ±0.30	x°: ±5.0°	TITLE : MINI50 STRAIGHT DUAL ROW ASSEMBLY SALES DRAWING(12~24P)		SHEET: 3/3	 THIRD ANGLE PROJECTION		A4
					x.x: ±0.20	x.x°: ±3.0°			SCALE: 1:1			
1X ORIGINAL Judyyan				APPD.: Billy	x.xx: ±0.15	x.xx°: ±2.0°	DATE: 24-Jun-2019	UNIT: mm				
REV. DESCRIPTION DR.BY ECN. NO					x.xxx: ±0.05	x.xxx°: ±1.0°						

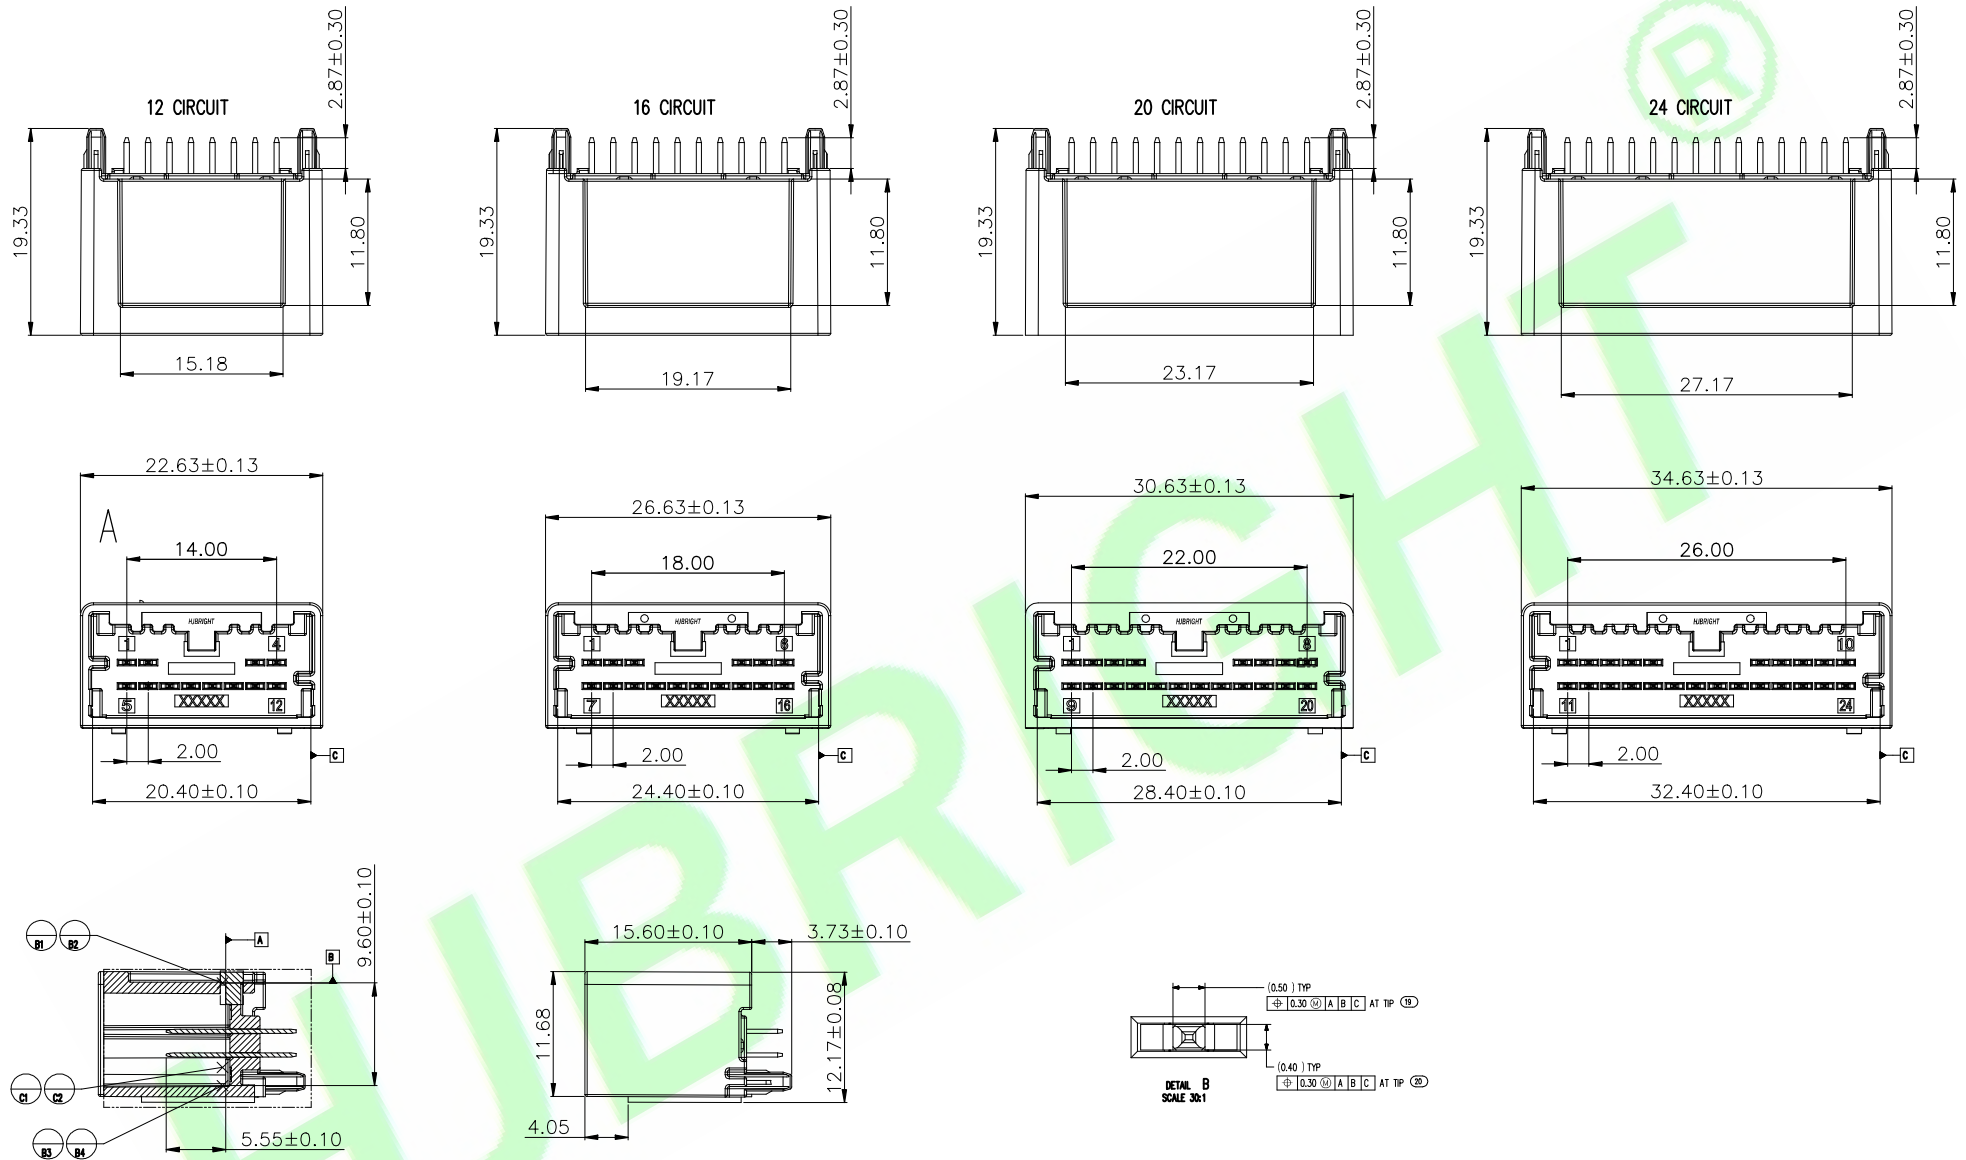


DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : A20062S-XXS-XC
	LINEAR	ANGLES	
	X.: ±0.30	X°: ±5.0°	DWG. NO.:
	X.X: ±0.20	X.X°: ±3.0°	
	X.XX: ±0.15	X.XX°: ±2.0°	TITLE :
CHKD.: Aren	X.XXX: ±0.05	X.XXX°: ±1.0°	
APPD.: Billy	DATE: 24-Jun-2019		MINI50 STRAIGHT DUAL ROW ASSEMBLY SALES DRAWING(12~24P)

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 2/3

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Judyyan	ECN. NO.
REV.	DESCRIPTION	DR.BY	