



Specifications:
Material And Finish:
Insulator:PA66 UL94V-0 Color:Natural
Contact:Brass
Plated:See Ordering Information

Rating:
Current Rating:3.0 Amp(22AWG)
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°~+105°C

Electrical:
Contact resistance:30m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1000V AC/Minute

Ordering Information
A2007S-XXX-01-XX
1 2 3 4 5 6

- 1: — Series No.
2: — S: Straight Type
3: — No. of Positions
4: — A: Gold Flash
S: Matte Tin Plated
Q: Tin Plated
5: — N: Natural
B: Black
6: — A: In Bag

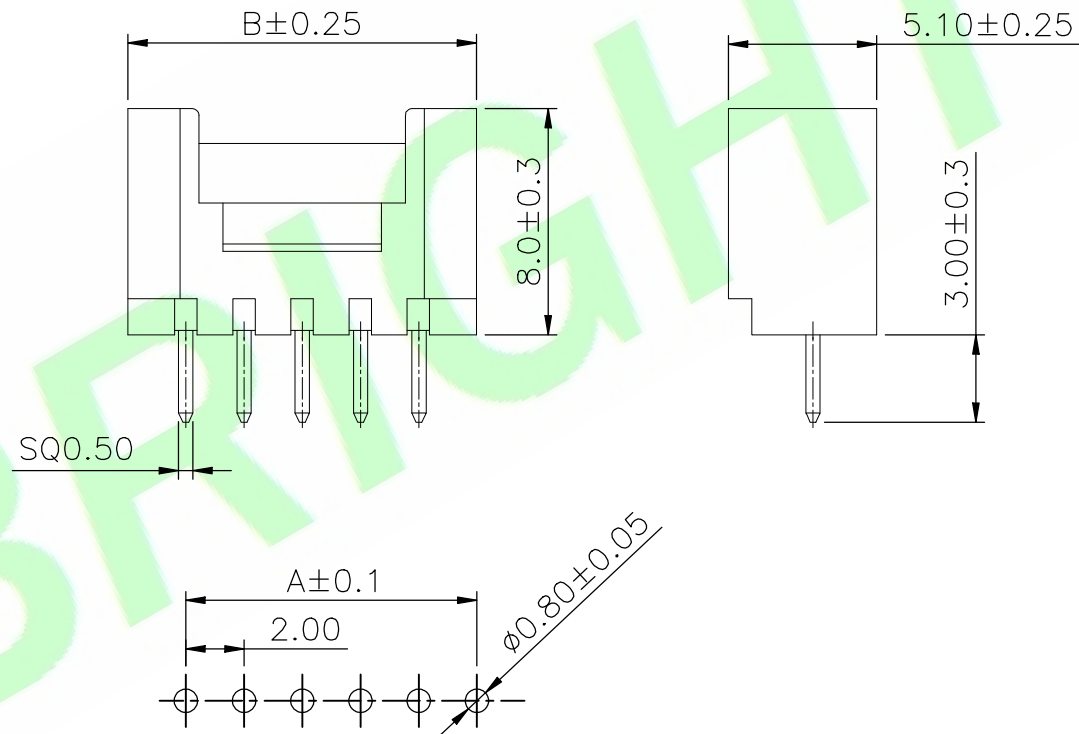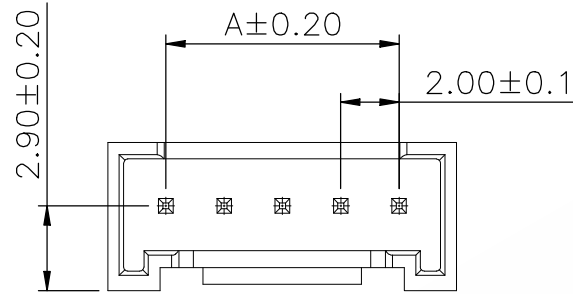


Recommended PCB Layout

Circ uits	Dimension mm	
	A	B
2P	2.00	6.00
3P	4.00	8.00
4P	6.00	10.0
5P	8.00	12.0
6P	10.0	14.0
7P	12.0	16.0
8P	14.0	18.0
9P	16.0	20.0
10P	18.0	22.0
11P	20.0	24.0
12P	22.0	26.0
13P	24.0	28.0
14P	26.0	30.0
15P	28.0	32.0
16P	30.0	34.0
17P	32.0	36.0
18P	34.0	38.0
19P	36.0	40.0
20P	38.0	42.0

DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : A2007S-XXX-01-XX
	LINEAR	ANGLES	
CHKD.: Tony	X.: ±0.30	X': ±5.0°	DWG. NO.:
	X.X: ±0.20	X.X': ±3.0°	
APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°	TITLE : 2.0mm Pitch Wafer Straight Type
	X.XXX: ±0.10	X.XXX': ±1.0°	
DATE: 04-Jun-2008			

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4

2X	Add new specifications and optimize the drawings according to the actual objects.	Judyyan	20250528
1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO.