



RoHS Compliant

Specifications:
Material And Finish:
Insulator:LCP UL94V-0
Contact:Copper alloy
Plated:See Ordering Information


Rating:
Current Rating:4.0Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°~+125°C
Contact Resistance:10mΩ Max
Insulation Resistance:1000MΩ Min
Withstanding Voltage: 1500V AC/minute

Ordering Information
A25000R-XXQ-XX-X
1 2 3 4 5 6




- 1:—Series No.
2:—R:R/A Type
3:—No. of Positions
4:—Q:Tin Plated
5:—01:A Type Black
02:B Type Nature
6:—B:In Tube
C:In Tray

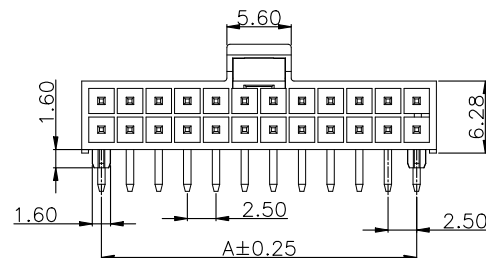

01:A Type Black



02:B Type Natural

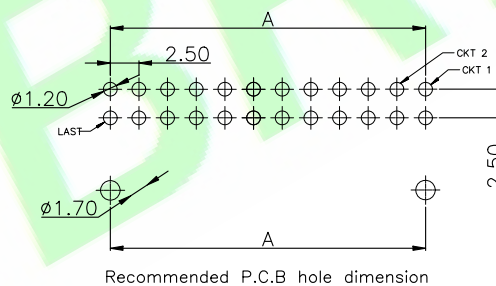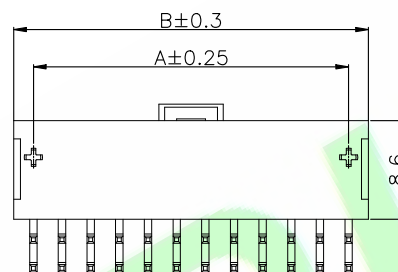

Poles	Dimensions (mm)	
	A	B
04P	2.50	5.94
06P	5.00	8.44
08P	7.50	10.94
10P	10.00	13.44
12P	12.50	15.94
14P	15.00	18.44
16P	17.50	20.94
18P	20.00	23.44
20P	22.50	25.94
22P	25.00	28.44
24P	27.50	30.94

DR.BY.:
Judyyan

CHKD.:
Tony

APPD.:
Billy

GENERAL TOLERANCE:

LINEAR

ANGLES

X.: ±5.0°

X.X: ±0.40 X.X': ±3.0°

X.XX: ±0.25 X.XX': ±2.0°

X.XXX: ±0.15 X.XXX': ±1.0°

PART NO : A25000R-XXQ-XX-X

DWG. NO.:

TITLE :

2.50mm PITCH 90° DUAL ROW WAFER

DATE: 24-Jun-2019

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

2X	Increase Dip dimensional tolerance	Judyyan	20260711
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO