

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PA6T UL94V-0 Color:Black

Contact:Copper alloy

Rating:

Current Rating:2.5 Amp,30 Amp

Voltage Rating:400V AC/DC

Operating Temperature Range:-40°~+125°C

Electrical:

Insulator resistance:

Signal Contact:10000M ohm min.

Power Contact:500M ohm min.

Withstanding Voltage:

Signal Contact:1000V DC/Minute

Power Contact:2500V DC/Minute

Ordering Information

A6358R-24FH-C

1 2 3 4 5 6

1: — Series No.





2: — R:R/A Type

3: — No. of Positions

4: — F:Female

5: — H:Selective Plated 30u" Gold
in contact area;Selective
100u" Min. Tin In tail area;
Nickel overall

6: — C:In Tray

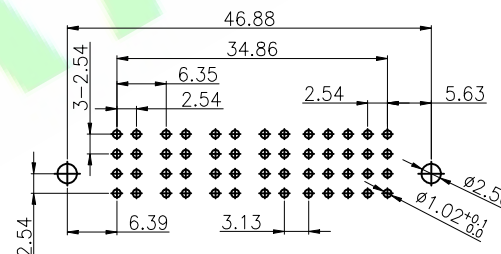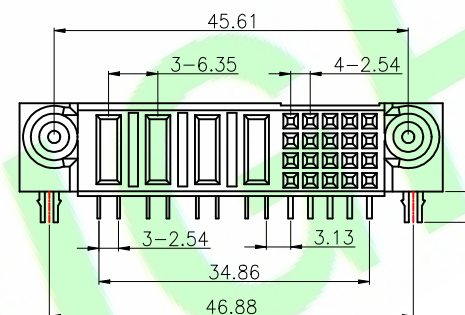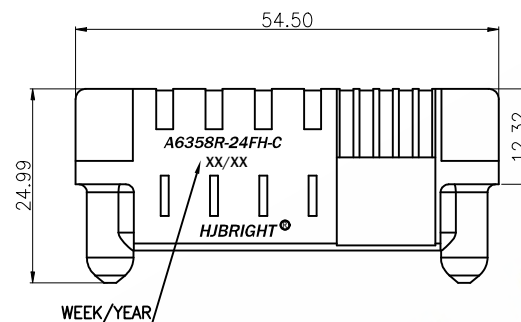

PCB LAYOUT

2X	Update the electrical performance specifications	Judyyan	20230821
1X	ORIGINAL	Mark	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Mark	GENERAL TOLERANCE:		PART NO : A6358R-24FH-C
	LINEAR	ANGLES	
CHKD.: Ren	X.: ±0.38	X': ±5.0°	DWG. NO.:
	X.X: ±0.30	X.X': ±3.0°	
APPD.: Billy	X.XX: ±0.25	X.XX': ±2.0°	TITLE : 6.35mm PCB Header P-S CONFIG. MULTI CTRS. R/A
	X.XXX: ±0.15	X.XXX': ±1.0°	
			DATE: 8-Mar-2021

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4