
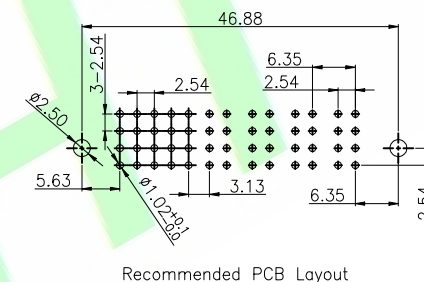


Contact: Copper alloy



Operating Temperature Range: $-40^{\circ}\sim+125^{\circ}\text{C}$

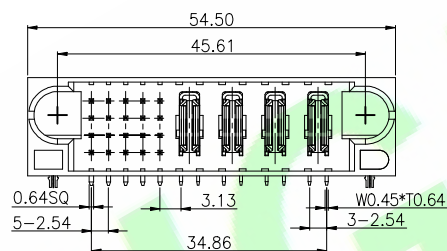

Power Contact:2500V DC/Minute

1	2	3	4	5	6
---	---	---	---	---	---

- 1: — Series No.
2: — R:R/A Type
3: — No. of Positions
4: — M:Male
5: — H:Selective Plated 30u" Gold
in contact area; Tin In tail area;
Nickel overall
6: — C:In Tray

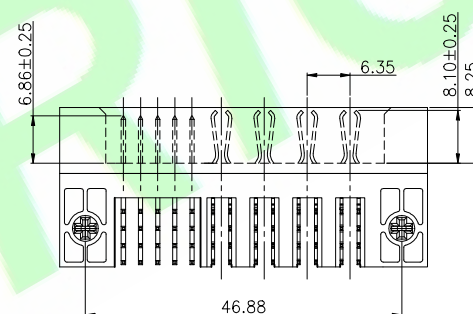

				DR.BY.: Mark	GENERAL TOLERANCE:		PART NO : A6358R-24MH-C	HJBRIGHT® 华洧电子科技有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
					LINEAR	ANGLES					DWG. NO.:
2X	Update the electrical performance specifications	Judyyan	20230821	CHKD.: Ren	x.: ±0.38	x': ±5.0°	TITLE :6.35mm PCB Header P-S CONFIG. MULTI CTRS. R/A Male Power Connector		SHEET: 1/1		A4
1X	ORIGINAL	Mark			x.x: ±0.30	x.x': ±3.0°			DATE: 8-Mar-2021		
REV.	DESCRIPTION	DR.BY	ECN. NO.	APPD.: Billy	x.xx: ±0.25	x.xx': ±2.0°	UNIT: mm	THIRD ANGLE PROJECTION			
					x.xxx: ±0.15	x.xxx': ±1.0°					