





Contact: Copper alloy

Operating Temperature Range: $-40^{\circ}\sim+125^{\circ}\text{C}$

Power Contact:2500V DC/Minute

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5} \quad \overline{6}$$

6: — C:\n Tray

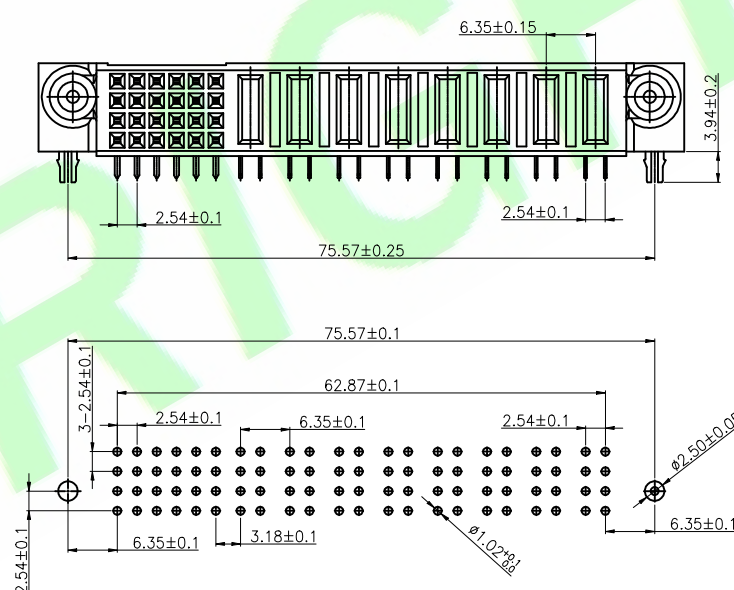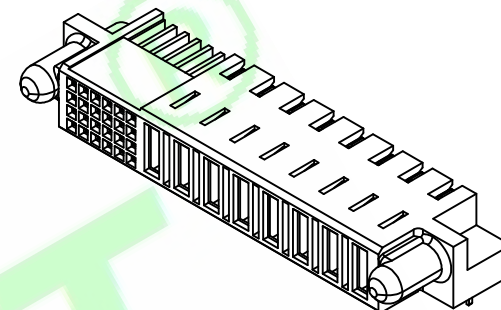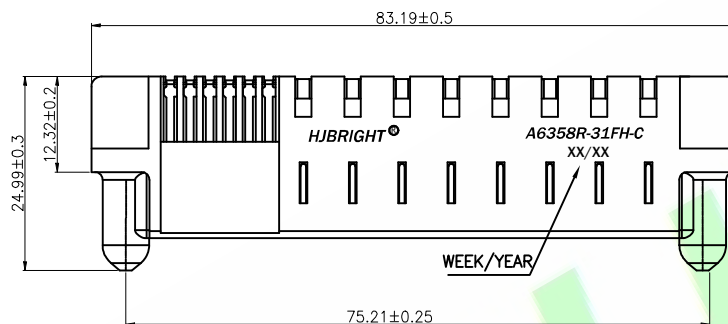

PCB LAYOUT

				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : A6358R-31FX-C		HJBRIGHT® BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED 東莞市華晶電子有限公司			
						LINEAR	ANGLES	DWG. NO.:				
				CHKD.: Ren	x.: ±0.38	x': ±5.0"	TITLE : 6.35mm PCB Header P-S CONFIG. MULTI CTRS. R/A 8P/24P			SHEET: 1/1		A4
						x.x: ±0.30				x.x': ±3.0"		
				APPD.: Billy	x.xx: ±0.25	x.xxx: ±2.0"	DATE: 20-Aug-2021			UNIT: mm		
						x.xxx: ±0.15				x.xxx': ±1.0"		
2X	Update the electrical performance specifications	Judyyan	20230821									
1X	ORIGINAL	Judyyan										
REV.	DESCRIPTION	DR.BY	ECN. NO.									