




Specifications:
Material And Finish:
Insulator:PBT+30% G.F. UL94V-0
Contact:Copper Alloy

Rating:
Current Rating:1.0 Amp
Voltage Rating:100V AC/DC
Operating Temperature Range:-40°~+105°C




Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1000V AC/Minute

Ordering Information
CS2542-XXX-XX-XX
1 2 3 4 5 6




- 1:—Series No.
2:—No. of Positions
3:—A:Gold Flash
Q:Tin Plated
H:Gold flash contact;
Tin on tail
4:—01:W/SR
02:W/O SR
5:—A:Two piece type
B:Three piece type
6:—A:In Bag
B:In Tube
C:In Tray

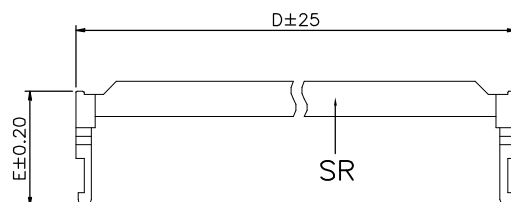

A:Two piece type

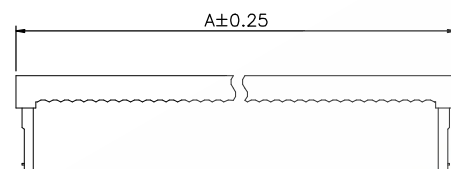

B:Three piece type

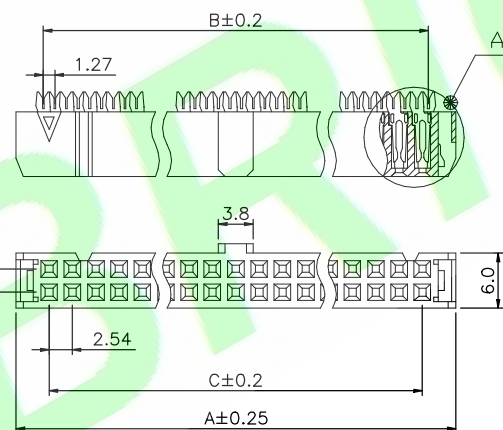

View A(Scale:2:1)

Pos.	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F
6	12.32	6.35	5.08	12.12	13.55	5.00
8	14.86	8.89	7.62	14.66	13.55	5.00
10	17.40	11.43	10.16	17.20	13.55	5.00
12	19.94	13.97	12.70	19.74	13.55	5.00
14	22.48	16.51	15.24	22.28	13.55	5.00
16	25.02	19.05	17.78	24.82	13.55	5.00
18	27.56	21.59	20.32	27.36	13.55	5.00
20	30.10	24.13	22.86	29.90	13.55	5.00
24	35.18	29.21	27.94	34.98	13.55	5.00
26	37.72	31.75	30.48	37.52	13.55	5.00
30	42.80	36.83	35.56	42.80	13.45	4.85
34	47.88	41.91	40.64	47.68	13.55	5.00
36	50.42	44.45	43.18	50.22	13.55	5.00
40	55.50	49.53	48.26	55.30	13.55	5.00
44	60.58	54.61	53.34	60.38	13.55	5.00
50	68.20	62.23	60.96	68.40	13.45	4.85
60	80.90	74.93	73.66	80.70	13.55	5.00
64	85.98	80.01	78.74	85.78	13.55	5.00

DR.BY.:
Samson
CHKD.:
Tony
APPD.:
Billy

GENERAL TOLERANCE:
LINEAR ANGLES
X.: ±0.30 X': ±5.0°
X.X: ±0.20 X.X': ±3.0°
X.XX: ±0.15 X.XX': ±2.0°
X.XXX: ±0.10 X.XXX': ±1.0°

PART NO : CS2542-XXX-XX-XX
DWG. NO.:
TITLE : FC-2.54 系列 三件式 (有鼻)
双接触端子
DATE: 03-Apr-2013

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4

3X	Update code options	Judyyan	20250331
2X	MODIFY B/C DIM	Sophia	20200703
1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO