

Specifications:

Material And Finish:

Housing:PBT UL94V-0 Color:Black

Contact:Copper Alloy

Shell:Zinc Alloy

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:250V AC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance: 30m Ohm Max






Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

FCN1270R-XXFX-01-X
1 2 3 4 5 6

- 1: — Series No.
2: — R:R/A Type
3: — No. of Positions
4: — F:Female
S:Matte Tin Plated
Q:Tin Plated
H:Gold flash on contact;
Tin on tail
5: — A:In Bag
B:In Tube
C:In Tray

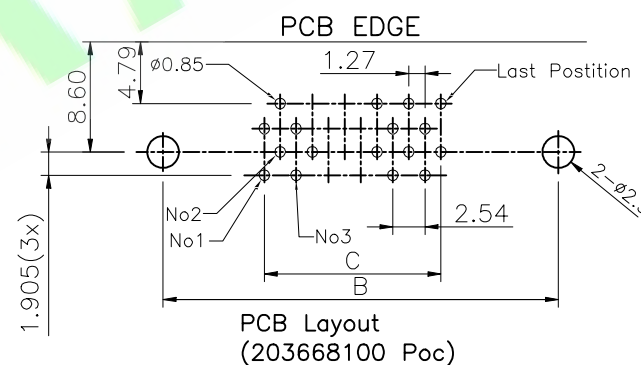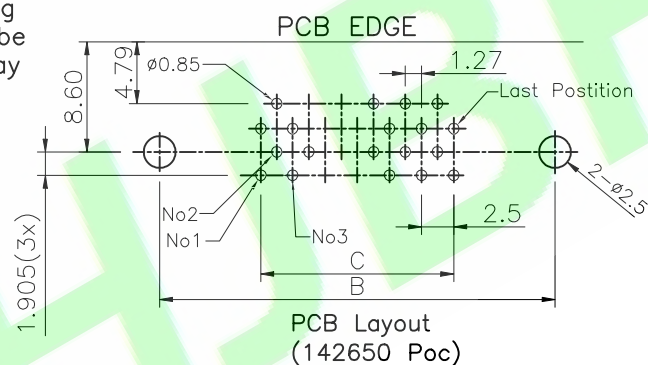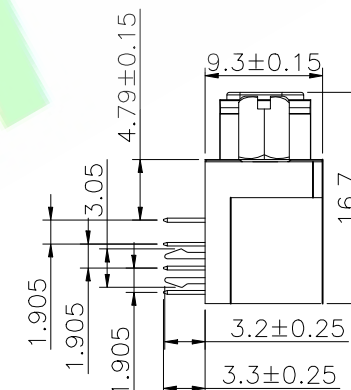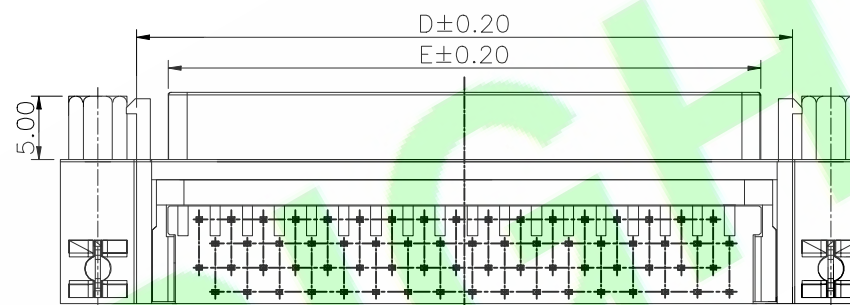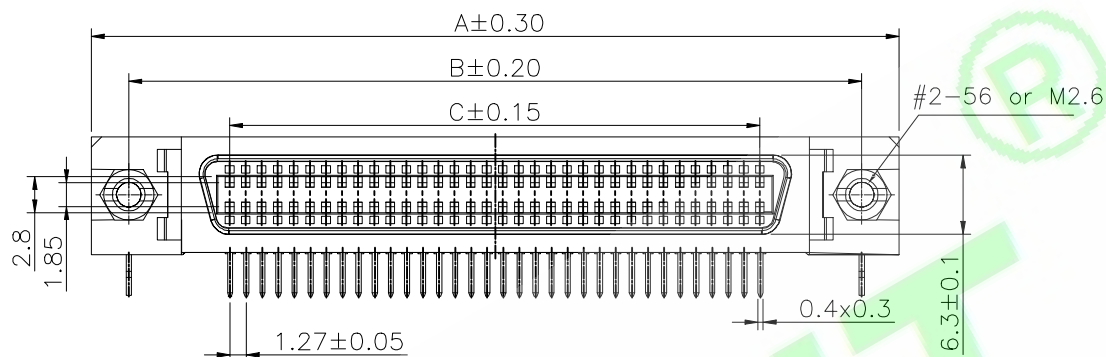

No.of Pin	DIMENSIONS				
	A	B	C	D	E
14	29.54	23.64	7.62	17.54	12.54
20	33.35	27.45	11.43	21.35	16.35
26	37.16	31.26	15.24	25.16	20.16
36	43.51	37.61	21.59	31.51	26.51
50	52.40	46.50	30.48	40.40	35.40
68	63.83	57.93	41.91	51.83	46.83
100	84.15	78.25	62.23	71.15	67.15

DR.BY: Bin

CHKD: Judyyan

APPD: Billy

GENERAL TOLERANCE:

LINEAR ANGLES

x.: ±0.38 x': ±2.0°

x.x: ±0.35 x.x': ±1.0°

x.xx: ±0.25 x.xx': ±0.5°

x.xxx: ±0.15 x.xxx': ±0.1°

PART NO : FCN1270R-XXFX-01-X

DWG. NO.:

TITLE :

SCSI Female head 90° MCR with screw

DATE: 26-Dec-2023

HJBRIGHT® 东莞市華晶電子有限公司

BRIGHT-E TECHNOLOGY ELECTRONIC LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGNAL	Bin	ECN. NO.
REV.	DESCRIPTION	DR.BY	