

Specifications:
Terminal: Copper alloy
Wire Range: AWG#8~16





Rating:
Current Rating: AWG#8 50A AC/DC
AWG#10 40A AC/DC
AWG#12 32A AC/DC

Electrical:
Contact resistance: 3.0m Ohm Max

Ordering Information

H10001TM-PX
1 23 4

- 1: Series No.
2: T: Terminal
3: M: Male Terminal
4: H: 1u" Gold on contact; Tin on tail
Q: Tin Plated
A2: 30u" Gold on contact; Tin on tail

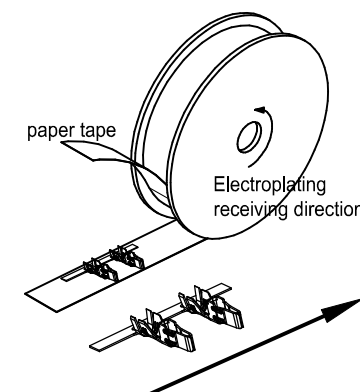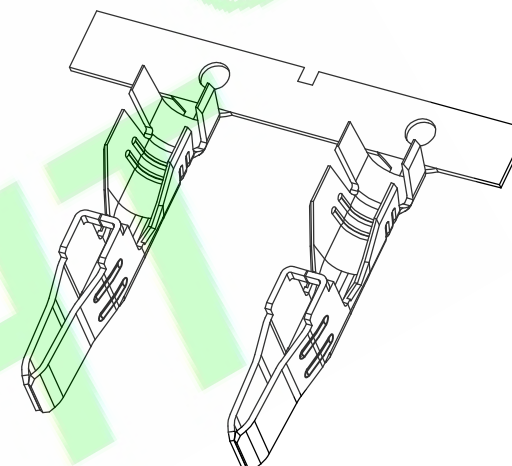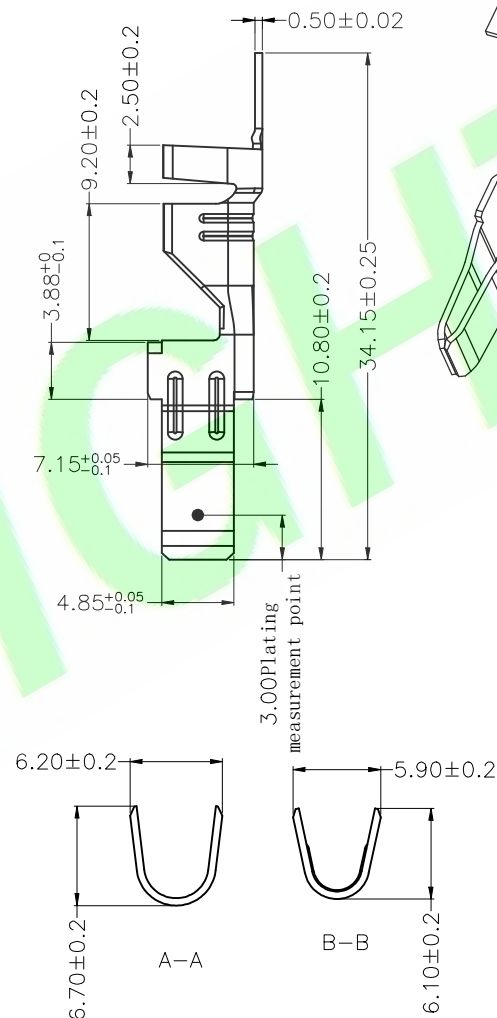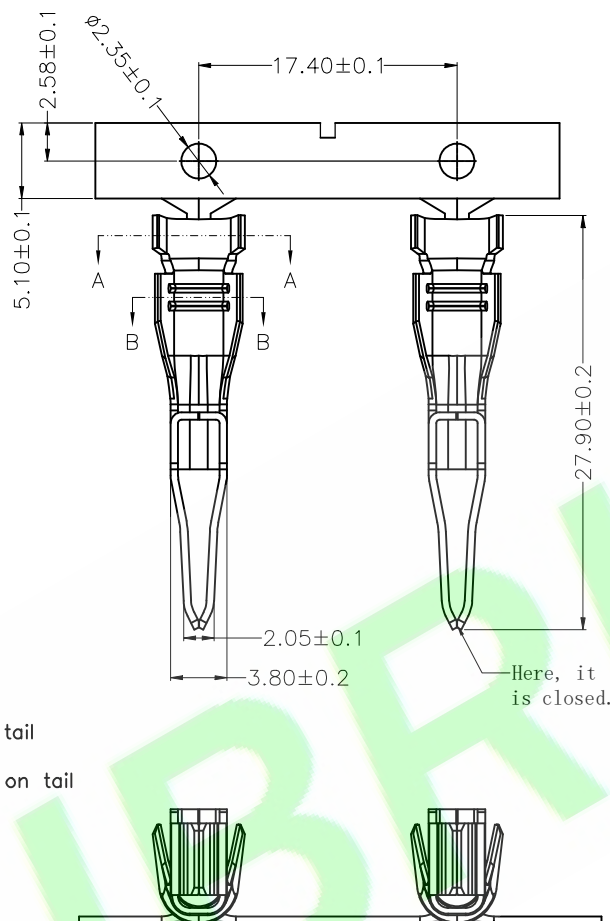

3X	Add details: Reinforcing ribs	Judyyan	20260321
2X	Revised drawing annotation	Judyyan	20220715
1X	ORIGINAL	Mark	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Mark	GENERAL TOLERANCE:	
CHKD.: Tony	LINEAR	ANGLES
APPD.: Billy	X.: ±0.15	X': ±5.0°
	X.X: ±0.10	X.X': ±3.0°
	X.XX: ±0.05	X.XX': ±2.0°
	X.XXX:	X.XXX': ±1.0°

PART NO : H10001TM-PX
DWG. NO.:
TITLE : 10.0mm Pitch male Terminal
DATE: 04-Jun-2021

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4