

Specifications:
Material And Finish:
Insulator:Nylon66 UL94V-0,
Color:Natural(White)





Rating:
Current Rating:1.0 Amp
Voltage Rating:125V AC/DC
Operating Temperature Range:-40°~+105°C

Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:100M ohm min.
Withstanding Voltage:250V AC/Minute


Ordering Information

H1250-XXP-XA
1 2 3 4


- 1:— Series No.
2:— No. of Positions
3:— N:Nature
B:Black
4:— A:In Bag

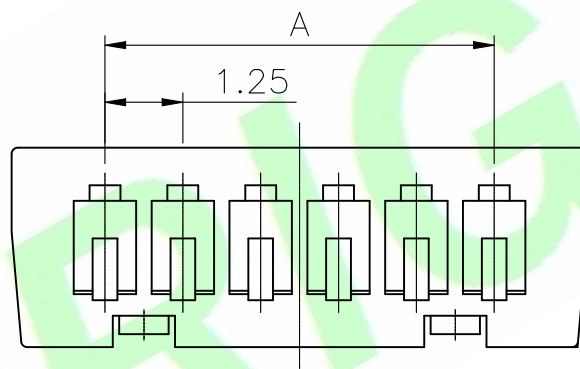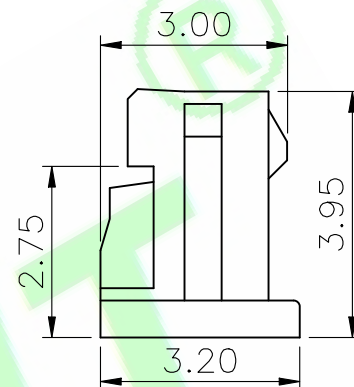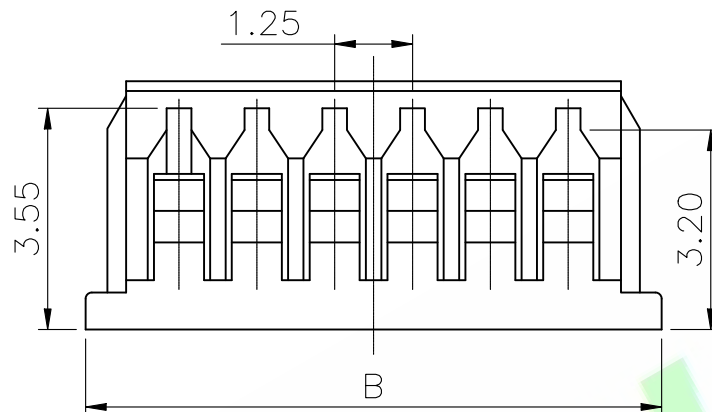

2P



3P



4P~15P


	Dimensions	
	A	B
2P	1.25	4.25
3P	2.50	5.50
4P	3.75	6.75
5P	5.00	8.00
6P	6.25	9.25
7P	7.50	10.50
8P	8.75	11.75
9P	10.00	13.00
10P	11.25	14.25
11P	12.50	15.50
12P	13.75	16.75
13P	15.00	18.00
14P	16.25	19.25
15P	17.50	20.50

3X	Update code options	Yawen	20260114
2X	Update code options	Judyyan	20220810
1X	ORIGINAL	Bruce	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Bruce	GENERAL TOLERANCE:		PART NO.: H1250-XXP-XA
	LINEAR	ANGLES	
CHKD.: Aaron	X.: ±0.25	X': ±2.0°	DWG. NO.:
	X.X: ±0.13	X.X': ±2.0°	
APPD.: Billy	X.XX: ±0.05	X.XX': ±2.0°	TITLE : 1.25mm Pitch Crimp Style Housing
	X.XXX: ±0.05	X.XXX': ±2.0°	
			DATE: 21-Oct-2017

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4