
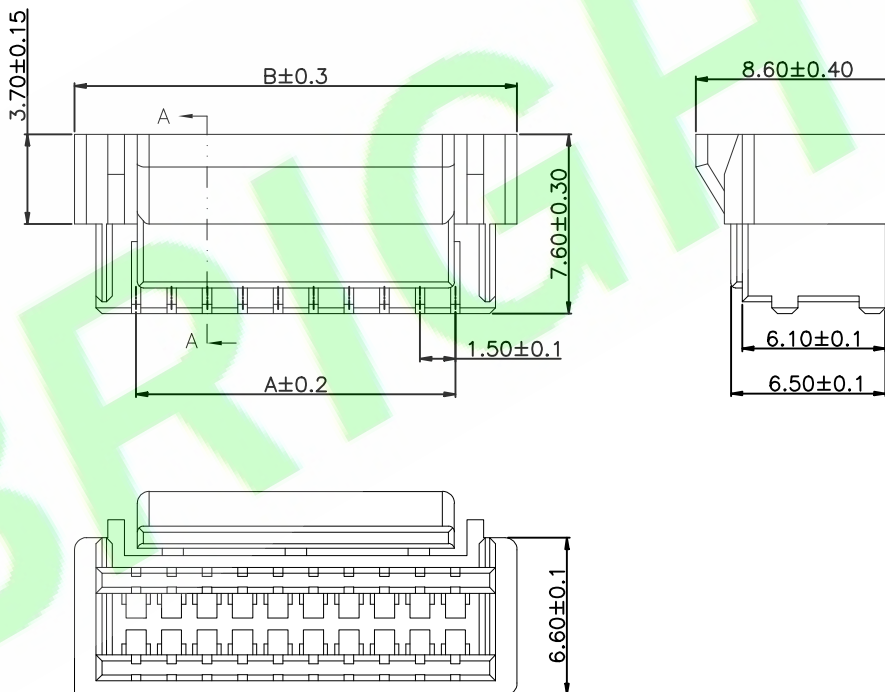



RoHS Compliant

Specifications:
Material And Finish:
Insulator: PA66 UL94V-0

Rating:
Current Rating: 10-30P (2A) /32-40P (1.5A) AC/DC
Voltage Rating: 100V AC/DC
Operating Temperature Range: -40°C~+105°C

Electrical:
Contact resistance: 30m Ohm Max.
Insulator resistance: 500M ohm min.
Withstanding Voltage: 500V AC/Minute

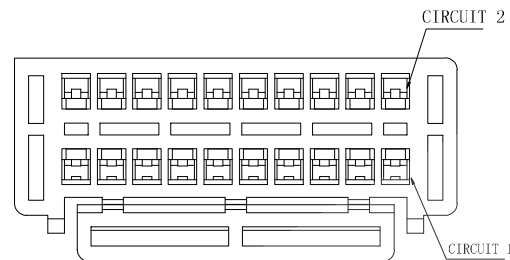

Ordering Information

H15005-XXP-XXA

1 2 3 4

- 1: — Series No.
2: — No. of Positions
3: — NA:Natural
BL:Blue
IV:Ivory
MG:Moss Green
TR:Tomato Red
DP:Dark Pink
4: — A:In Bag

Circ uits	Dimensino (mm)	
	A	B
2X2	1.50	6.70
2X3	3.00	8.20
2X4	4.50	9.70
2X5	6.00	11.20
2X6	7.50	12.70
2X7	9.00	14.20
2X8	10.50	15.70
2X9	12.00	17.20
2X10	13.50	18.70
2X11	15.00	20.20
2X12	16.50	21.70
2X13	18.00	23.20
2X14	19.50	24.70
2X15	21.00	26.20
2X16	22.50	27.70
2X17	24.00	29.20
2X18	25.50	30.70
2X19	27.00	32.20
2X20	28.50	33.70

				DR.BY.: Ken	GENERAL TOLERANCE:		PART NO : H15005—XXP—XXA		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT—E ELECTRONIC TECHNOLOGY LIMITED			
					LINEAR	ANGLES	DWG. NO.:					
3X	New PIN view added	Judyyan	20260126	CHKD.: Tony	x.: x.x: ±0.25	x': x.x': ±6°	TITLE : 1.50mm Pitch Housing		SHEET: 1/2			A4
2X	Update code options	Judyyan	20220820		x.xx: ±0.15	x.x'x': ±3°			SCALE: 1:1			
1X	ORIGINAL	Ken		APPD.: Billy	x.xxx: ±0.08	x.x'x'x': ±2°	DATE: 19—May—2021		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO									



				DR.BY.: Ken	GENERAL TOLERANCE: LINEAR ANGLES		PART NO : H15005-XXP-XXA	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
3X	New PIN view added	Judyyan	20260126	CHKD.: Tony	x.: x": ±	DWG. NO.:	SHEET: 2/2		
2X	Update code options	Judyyan	20220820		x.x: ±0.25 x.x": ±6°	TITLE : 1.50mm Pitch Housing	SCALE: 1:1		
1X	ORIGINAL	Ken		APPD.: Billy	x.xx: ±0.15 x.xx": ±3°	DATE: 19-May-2021	UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.08 x.xxx": ±2°			 THIRD ANGLE PROJECTION	A4