



Specifications:
Material And Finish: phosphor bronze
Wire Range:AWG#24~28
Insulation O.D.: 1.3(max)


Ordering Information
H15005T-PX

1 2 3


1: — Series No.
2: — T:Terminal
3: — Plated:
A:Gold Flash
Q:Tin Plated

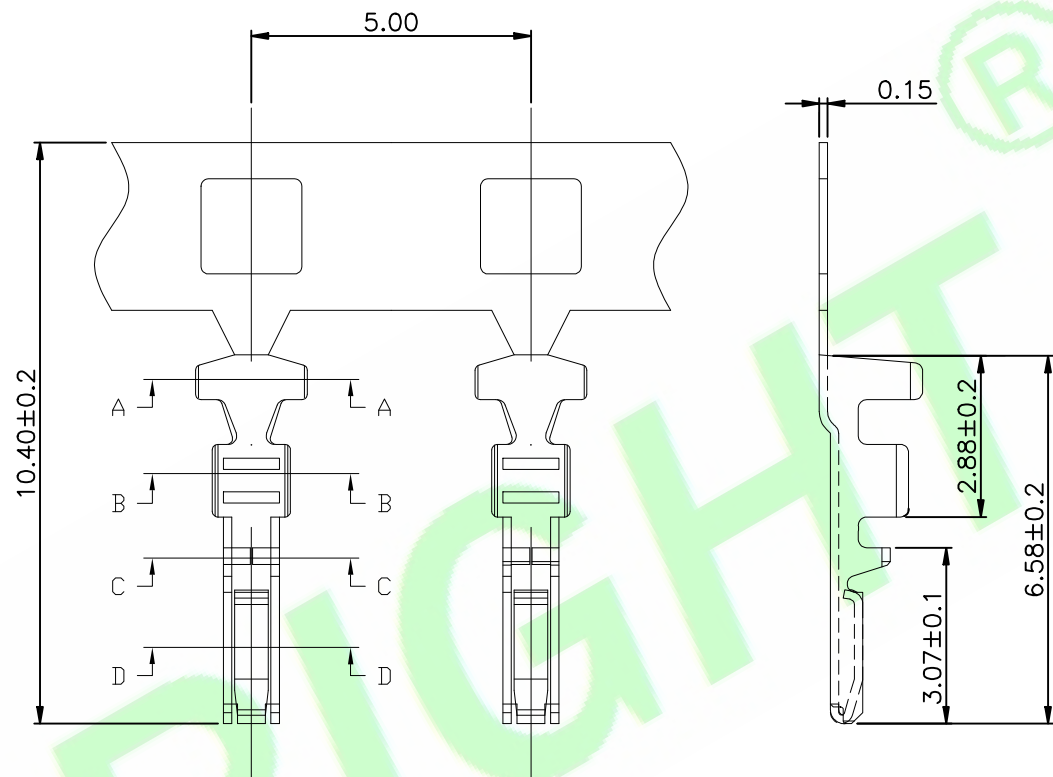


SEC:A-A




SEC:B-B



SEC:C-C



SEC:D-D

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : H15005T-PX	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				Ken	LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.:	x.: ±5.0°	x': ±5.0°	TITLE : 1.5mm Pitch Crimp Terminal	SHEET: 1/1	 THIRD ANGLE PROJECTION	A4
2X				Mark	x.x: ±0.25	x.x': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Ken		APPD.:	x.xx: ±0.15	x.xx': ±2.0°	DATE: 21-Oct-2017	UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.08	x.xxx': ±1.0°				