



RoHS Compliant

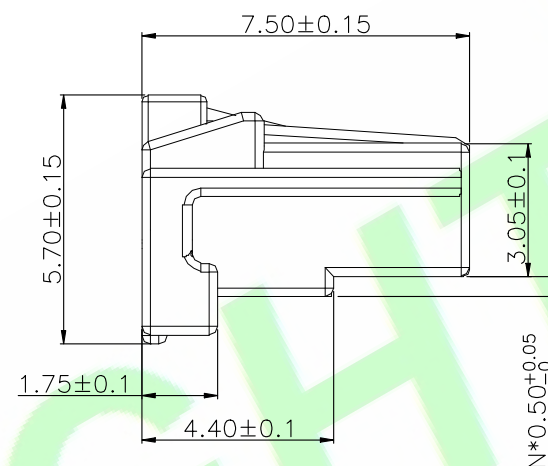

Specifications:
Material And Finish:
Insulator:PBT UL94V-0

Rating:
Current Rating:2.0 Amp
Voltage Rating:125V AC/DC
Operating Temperature Range:-25°~+85°C
Contact Resistance:20mΩ Max
Insulation Resistance 500MΩ Min
Withstanding Voltage:500V AC/mInute

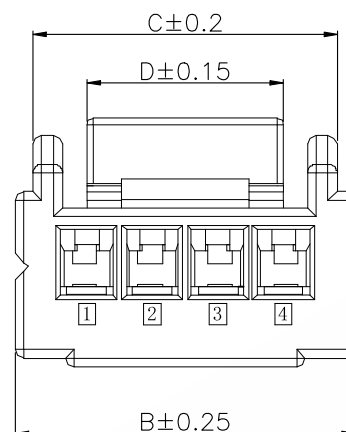


Ordering Information

H1502-XXP-AX

1 2 3 4

- 1: — Series No.
2: — No. of Positions
3: — A:In Bag
4: — N:Natural
B:Black

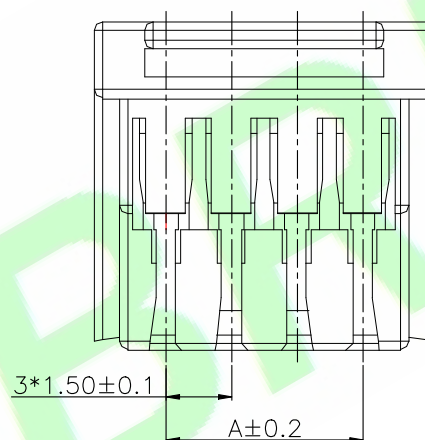

Poles	Dimensions(mm)			
	A	B	C	D
02	1.50	5.00	5.00	2.70
03	3.00	6.30	5.45	3.50
04	4.50	7.80	6.95	4.50
05	6.00	9.30	6.81	
06	7.50	10.80	9.95	7.50
07	9.00	12.30	9.81	
08	10.50	13.80	12.25	9.80
09	12.00	15.30	12.51	
10	13.50	16.80		
11	15.00	18.30		
12	16.50	19.80		
13	18.00	21.30	14.01	11.30
14	19.50	22.80		
15	21.00	24.30		
16	22.50	25.80		

3X	Add color codes	Judyyan	20250703
2X	Update code optionsd	Judyyan	20220810
1X	ORIGINAL	Mark	
REV.	DESCRIPTION	DR.BY	ECN. NO.


DR.BY.: Mark	GENERAL TOLERANCE:		PART NO : H1502-XXP-AX
	LINEAR	ANGLES	
CHKD.: Aaron	X.: ±0.25	X.X: ±3.0°	DWG. NO.:
	X.XX: ±0.13	X.XX: ±2.0°	
APPD.: Billy	X.XXX: ±0.05	X.XXX: ±1.0°	TITLE : 1.5mm Pitch Housing
			DATE: 28-Aug-2021

HJBRIGHT 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4