

RoHS Compliant

Specifications:

Material And Finish:

Insulator:Nylon66 UL94V-0 Color:Natural

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:30m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:800V AC/Minute

Ordering Information

H20002M-XXP-A




1 2 3 4

1: — Series No.

2: — M:Male

3: — No. of Positions

4: — A:In bag

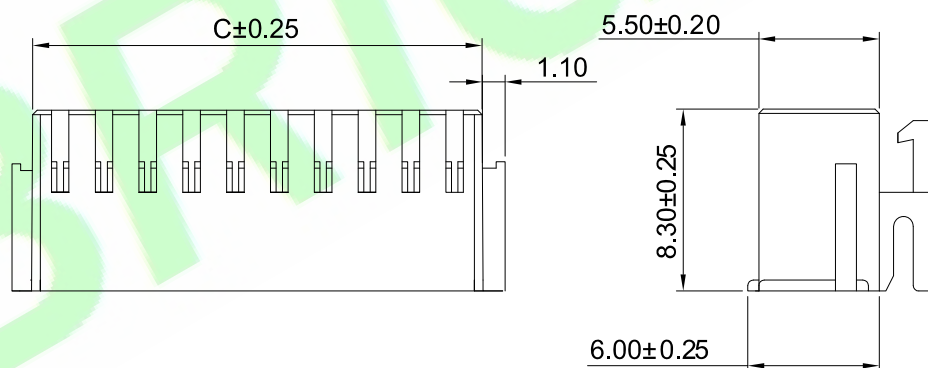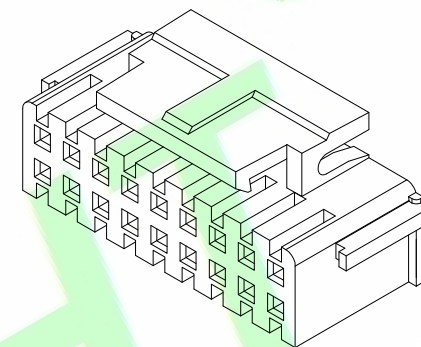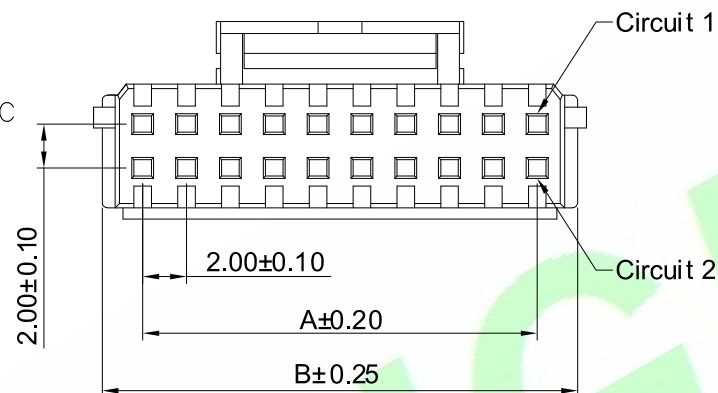

Pin数	Dimensions		
	A	B	C
04	2.00	5.70	4.70
06	4.00	7.70	6.70
08	6.00	9.70	8.70
10	8.00	11.70	10.70
12	10.00	13.70	12.70
14	12.00	15.70	14.70
16	14.00	17.70	16.70
18	16.00	19.70	18.70
20	18.00	21.70	20.70
22	20.00	23.70	22.70
24	22.00	25.70	24.70
26	24.00	27.70	26.70
28	26.00	29.70	28.70
30	28.00	31.70	30.70
32	30.00	33.70	32.70
40	38.00	41.70	40.70

DR.BY.:
Samson

GENERAL TOLERANCE:

LINEAR

ANGLES

x.: ±5.0°

x.x: ±0.30 x.x': ±3.0°

x.xx: ±0.20 x.xx': ±2.0°

x.xxx: ±0.10 x.xxx': ±1.0°

PART NO : H20002M-XXP-A

DWG. NO.:

TITLE :

2.00mm Dual Row Male Housing

DATE: 12-Jan-2015

HJBRIGHT®

東莞市華晶電子有限公司

BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

3X	Add 4PIN	Judyyan	20260728
2X	Update code options	Judyyan	20220826
1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO