

Specifications:**Material And Finish:**

Insulator:Nylon 66 UL94V-0 Color:Natural

Rating:

Current Rating:3.0 Amp (AC/DC)

Voltage Rating:125V AC/DC

Operating Temperature Range:-40°C~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering Information






H2013-XXP-A

1 2 3


1:— Series No.

2:— No. of Positions

3:— A:In Bag

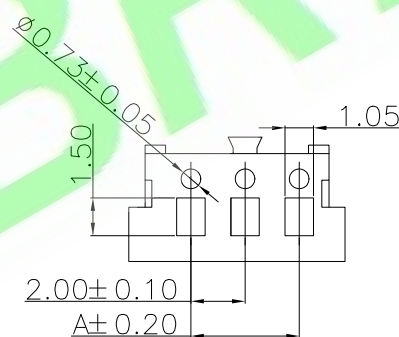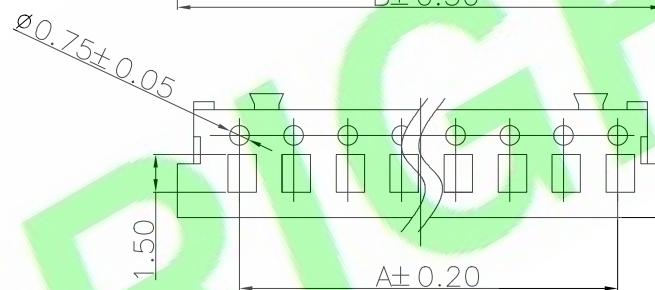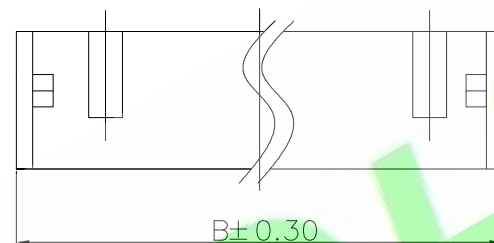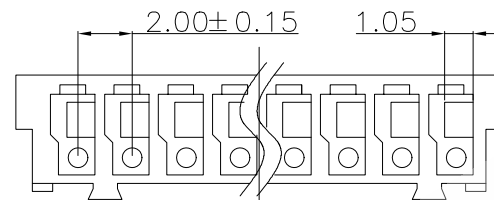

3PIN

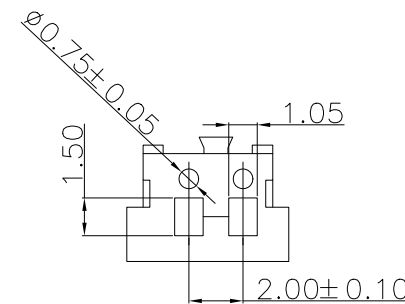

2PIN

PART NO.	Dimensions	
	A	B
02P	2.0	6.0
03P	4.0	8.0
04P	6.0	10.0
05P	8.0	12.0
06P	10.0	14.0
07P	12.0	16.0
08P	14.0	18.0
09P	16.0	20.0
10P	18.0	22.0
11P	20.0	24.0
12P	22.0	26.0
13P	24.0	28.0
14P	26.0	30.0
15P	28.0	32.0

DR.BY.: Samson

GENERAL TOLERANCE:

PART NO : H2013-XXP-A

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

CHKD.: Judyyan

LINEAR ANGLES

DWG. NO.:

TITLE :

2.0mm Pitch Housing

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

APPD.: Billy

x.: ±0.30 x': ±5.0°
x.x: ±0.30 x.x': ±3.0°
x.xx: ±0.20 x.xx': ±2.0°
x.xxx: ±0.10 x.xxx': ±1.0°

DATE: 28-Nov-2011

3X	Drawing Update	Xiao	20260328
2X	Update code options	Judyyan	20220927
1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO