


Specifications:
Material And Finish:
Insulator:ABS UL94V-0
Color:Black/Gray

Rating:
Current Rating:3.0 Amp
Voltage Rating:125V AC/DC
Temperature Range:-40°C~+125°C

Electrical:
Contact resistance:10m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:500V AC/Minute

Ordering Information
H2019-XXP-KA-XX
1 2 3 4 5

1: — Series No.
2: — No. of Positions
3: — K:Snap-fit
4: — A:In Bag
5: — GR:Grey
(Without this code:Black)

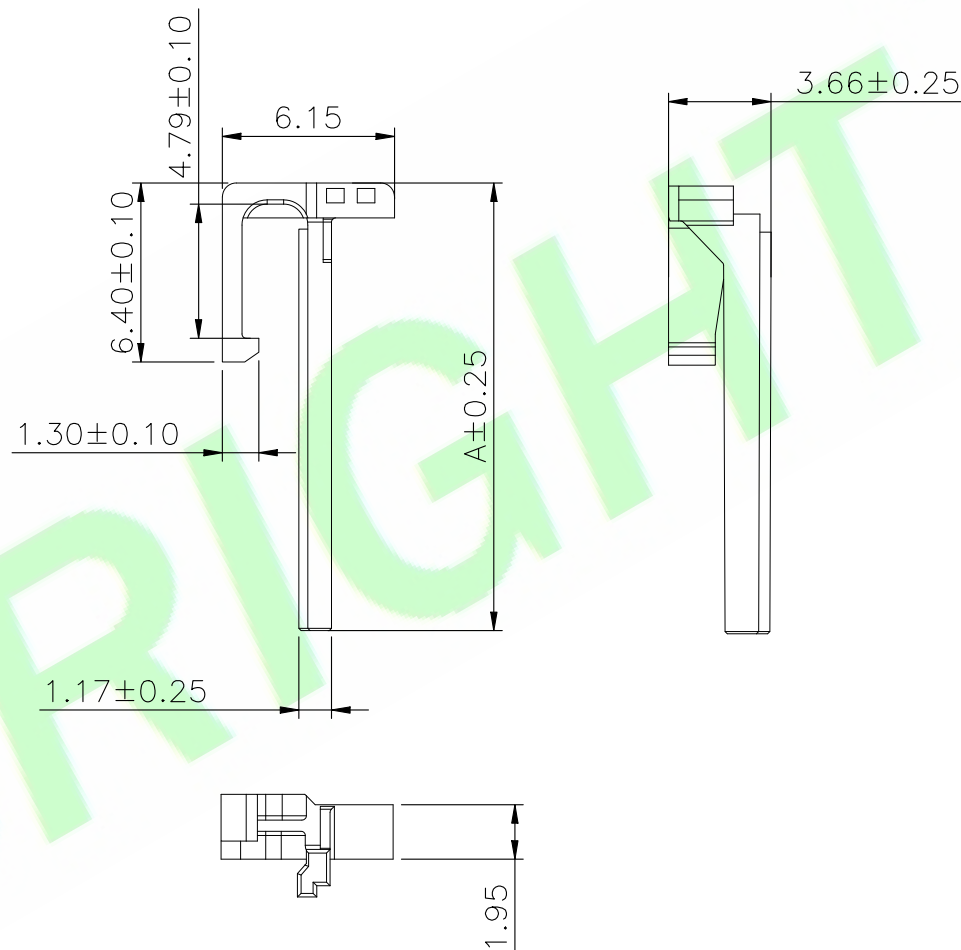

Circuits	A
2	6.30
3	8.30
4	10.30
5	12.30
6	14.30
7	16.30
8	18.30
9	20.30
10	22.30
11	24.30
12	26.30
13	28.30
14	30.30

				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : H2019-XXP-KA-XX	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
					LINEAR	ANGLES	DWG. NO.:			
3X	Update the code options and materials	Judyyan	20260819	CHKD.: Aren	x.:	x': ±5.0°	TITLE : 2.00mm Pitch Housing Snap-fit	SHEET: 1/1		A4
2X	Update Drawing	Zolin	20250520		x.x: ±0.30	x.x': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Judyyan		APPD.:	x.xx: ±0.25	x.xx': ±2.0°		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 20-Jul-2021			