

Specifications:

Material And Finish:

Insulator: UL94V-0

Rating:

Current Rating: 5.5Amp (20AWG)

Voltage Rating: 250V AC/DC

Operating Temperature Range: -40°C ~ +125°C

Electrical:

Contact resistance: 10m Ohm Max

Insulator resistance: 1000M ohm min.

Withstanding Voltage: 0V AC/Minute

Ordering Information

H25000-XXP-XX-A

1 2 3 4

1: Series No.






2: No. of Positions

3: 01: A Type Black

02: B Type Natural

4: A: Bag

No.	Dimension mm	
	A	B
4	7.70	2.50
6	10.20	5.00
8	12.70	7.50
10	15.20	10.00
12	17.70	12.50
14	20.20	15.00
16	22.70	17.50

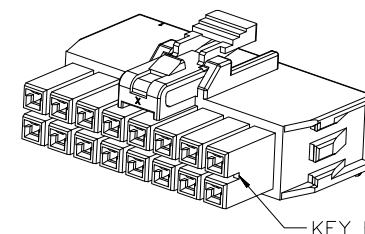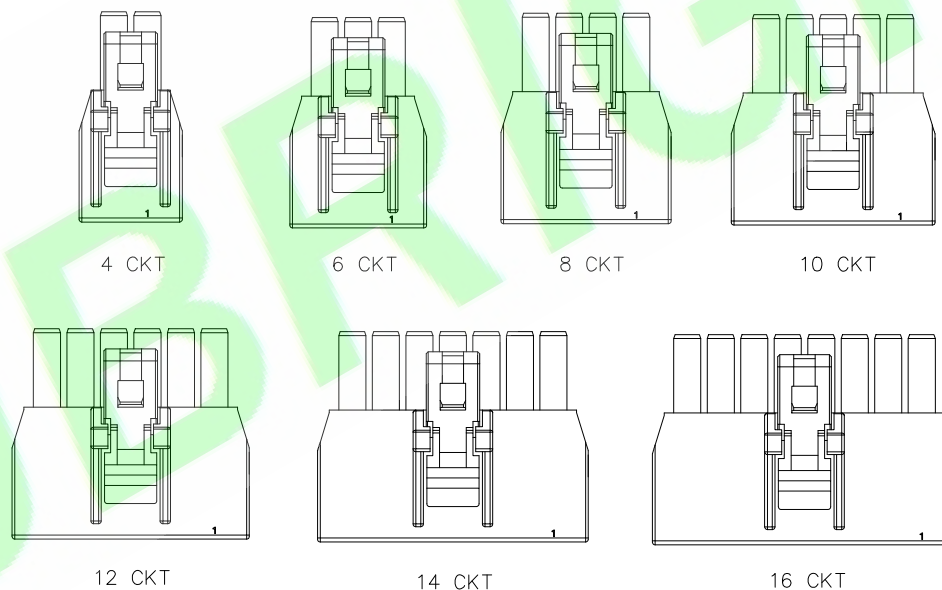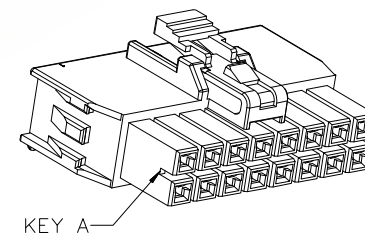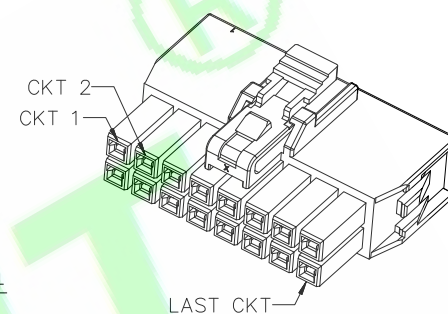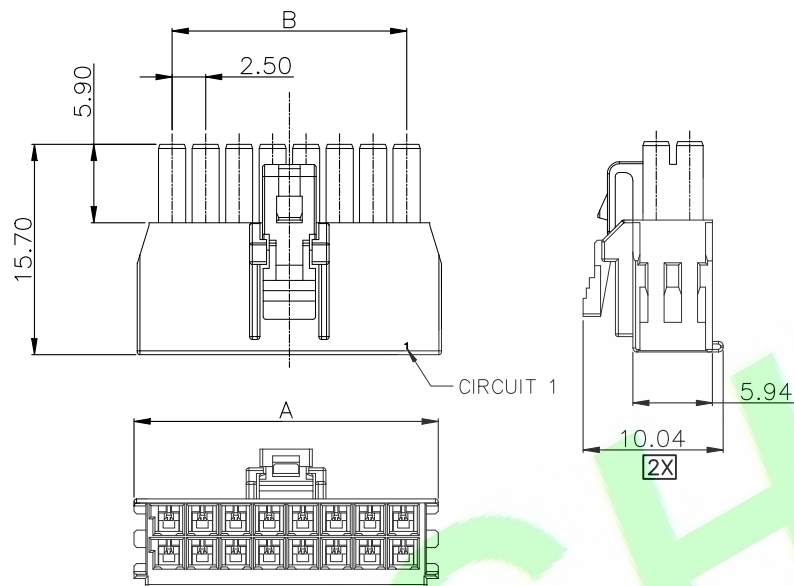

2X	修正尺寸标注: 10.4修正为10.04	Judyyan	20260519	DR.BY:	GENERAL TOLERANCE:		PART NO : H25000-XXP-XX-A	HJBRIGHT® 东莞市華晶电子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
				Judyyan	LINEAR	ANGLES			
1X	ORIGINAL	Judyyan		CHKD.: Tony	X.: ±0.40	X': ±5.0°	DWG. NO.:	SHEET: 1/1	THIRD ANGLE PROJECTION
REV.	DESCRIPTION	DR.BY	ECN. NO.	APPD.: Billy	X.X: ±0.30	X.X': ±3.0°	TITLE : 2.5mm Pitch Wafer For Housing	SCALE: 1:1	
					X.XX: ±0.25	X.XX': ±2.0°		UNIT: mm	
					X.XXX: ±0.15	X.XXX': ±1.0°	DATE: 11-Jul-2019		A4