

Specifications:**Material And Finish:**

Insulator: PBT UL94V-0

Color: See Ordering Information

Rating:

Current Rating: 3.5 Amp (22AWG)

Working voltage: 250V AC/DC

Operating Temperature Range: $-40^{\circ}\sim+120^{\circ}\text{C}$ **Ordering Information****H25414M-04-XXA**

1 2 3 4 5

1: — Series No.

2: — M: Male Housing

3: — No. of Positions

4: — BA: A Type Black




NB: B Type Natural

CL: C Type Blue


VD: D Type Violet

GE: E Type Green

5: — A: In Bag

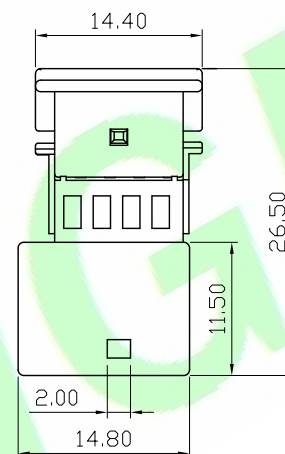

A Type	B Type	C Type	D Type	E Type
BLACK	NATURAL	BLUE	VIOLET	GREEN

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : H25414M-04-XXA		HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.: Aren	X.: ±	X': ±	TITLE : 2.54mm Pitch Male Housing		SHEET: 1/1			A4
2X	Update code options	Judyyan	20220824		X.X: ±0.30	X.X': ±			SCALE: 1:1			
1X	ORIGINAL	Judyyan		APPD.: Billy	X.XX: ±0.20	X.XX': ±	DATE: 19-Aug-2020		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±						