

Specifications:

Material And Finish:

Insulator:PBT UL94V-0
Color:See Ordering Information

Rating:

Current Rating:7.5 Amp (22AWG)
Voltage Rating:250V DC
Operating Temperature Range:-40°~+120°C

Electrical:






Contact resistance:10m Ohm Max
Insulator resistance:100M ohm min.
Withstanding Voltage:500V AC/Minute



Ordering Information

H25414M3-04P-XXA

1 2 3 4 5 6

- 1:— Series No.
- 2:— F:Female
- 3:— No. of Positions
- 4:— A:A Type With CPA
B:B Type With Out CPA
- 5:— GR:Dark Grey
Y:Yellow
B:Black
- 6:— A:In Bag

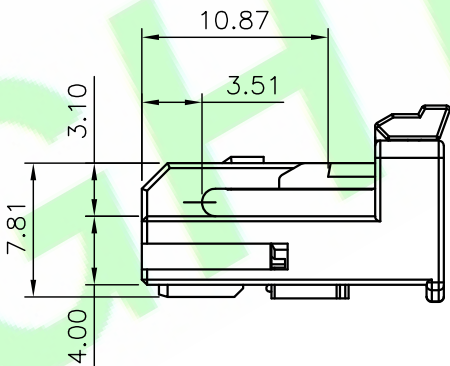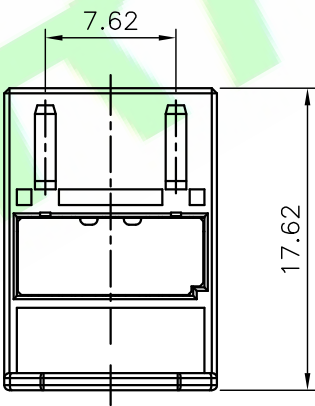

A Type With CPA	B Type With Out CPA
	

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : H25414M3-04P-XXA	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR		ANGLES			
3X				CHKD.: Ren	X.: ±	X': ±	TITLE : 2.54mm Pitch 04P Male Housing	SHEET: 1/1		A4
2X	Update the drawings	Zolin	20260326		X.X: ±0.30	X.X': ±		SCALE: 1:1		
1X	ORIGINAL	Judyyan		APPD.: Billy	X.XX: ±0.20	X.XX': ±		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO		X.XXX: ±0.10	X.XXX': ±	DATE: 15-Aug-2022			