

RoHS Compliant



Specifications:

Material: Copper alloy

Wire Range: 0.5~1.5mm²

Plated: See Ordering Information

Insertion and extraction force: 2~6N

Ordering Information

H35012TF-PQ-01

1 23 4



1:—Series No.

2:—T:Terminal

3:—F:Female

4:—Plated:

Q:Plated Tin

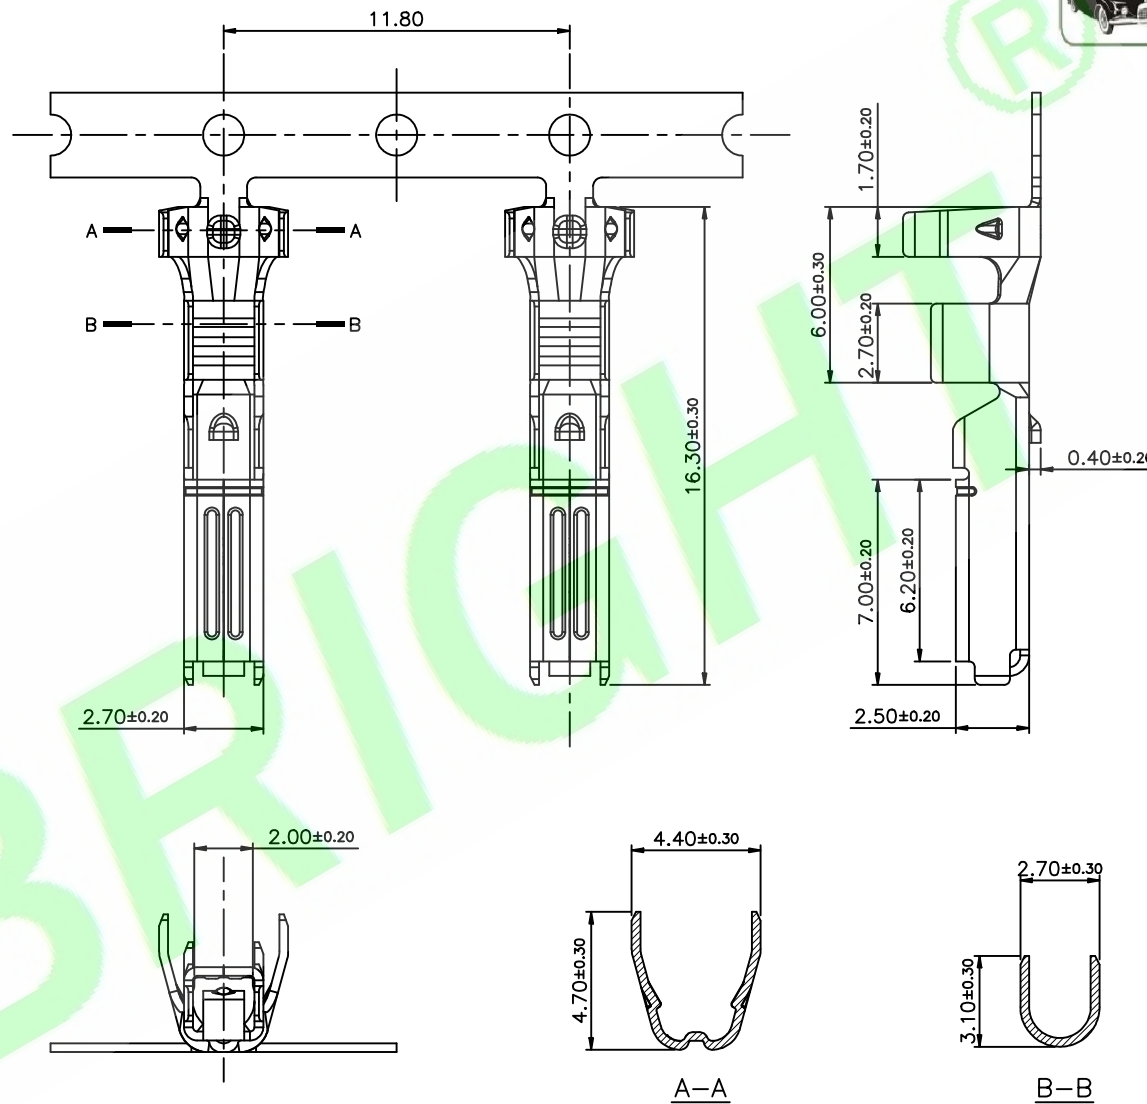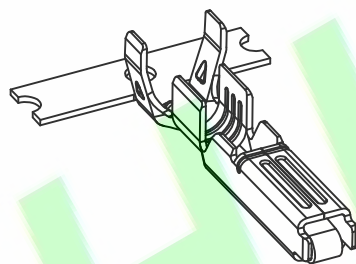

2X	Reduce the insertion and extraction force	Hu.CH	2025.10.15
1X	ORIGINAL	Hu.CH	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Hu.CH	GENERAL TOLERANCE:	
	LINEAR	ANGLES
CHKD.: Sam	X.: ±0.40	X': REF±6°
	X.X: ±0.35	X.X': ±3.0°
APPD.: Billy	X.XX: ±0.25	X.XX': ±2.0°
	X.XXX: ±0.15	X.XXX':

PART NO : H35012TF-PQ-01
DWG. NO.:
TITLE : 3.50mm Pitch Female Terminal
DATE: 20-Mar-2025

HJBRIGHT® 東莞市華晶電子有限公司	
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
SHEET: 1/1	
SCALE: 1:1	
UNIT: mm	
THIRD ANGLE PROJECTION	
A4	