

Specifications:
Material And Finish:
Insulator:PA66 UL94V-0






Rating:
Current Rating:7.0A(AWG#18)/10A(AWG#16)
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°~+105°C

Electrical:
Contact resistance:10m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1500V AC/Minute

Ordering Information

H3961-XXP-XA
1 2 3 4

- 1: — Series No.
2: — No. of Positions
3: — N:Natural
B:Black
W:White
Y:Yellow
BR:Brown
GN:Green
4: — A:In Bag

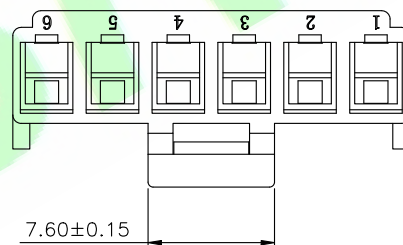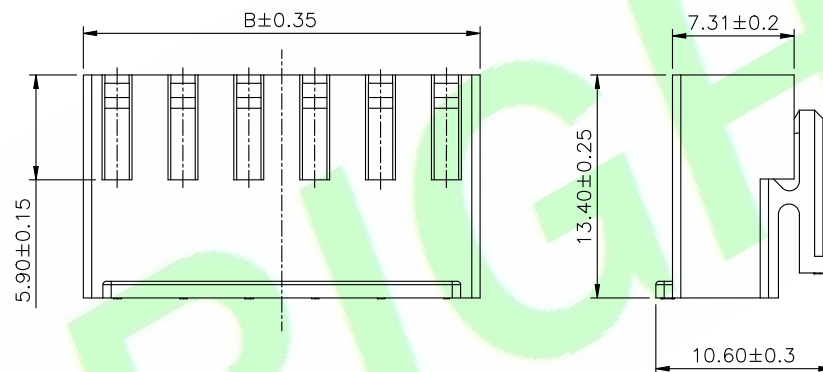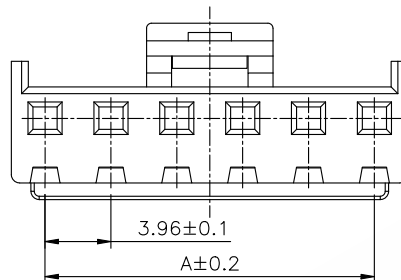

Ordering Information&Dimensions

Poles	Dimensions(mm)	
	A	B
02	3.96	8.56
03	7.92	11.98
04	11.88	15.94
05	15.84	19.90
06	19.80	23.86
07	23.76	27.82
08	27.72	31.78
09	31.68	35.74
10	35.64	39.70
11	39.60	43.66

DR.BY.:
Sophia

GENERAL TOLERANCE:
LINEAR ANGLES

PART NO : H3961-XXP-XA

CHKD.: Tony

x.: ±5.0°
x.x: ±3.0°

DWG. NO.:

APPD.: Billy

x.xx: ±0.05 x.xx': ±2.0°
x.xxx: ±0.02 x.xxx': ±1.0°

TITLE :

3.96mm Pitch Housing


DATE: 06-May-2020

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

3X	Optimize the drawing	Judyyan	20260120
2X	Updating electrical spec	Judyyan	20220809
1X	ORIGINAL	Sophia	
REV.	DESCRIPTION	DR.BY	ECN. NO