


RoHS Compliant

Specifications:
Material And Finish:
Insulator:PBT UL94V-0


Ordering Information
H400005-XXP-XX-X
1 2 3 4

- 1:—Series No.
2:—No. of Positions
3:—See Table
4:—A:In bag
B:In Tube
C:In Tray


Circuits	Dimension mm
08	27.40
14	35.40
23	47.40
35	63.40

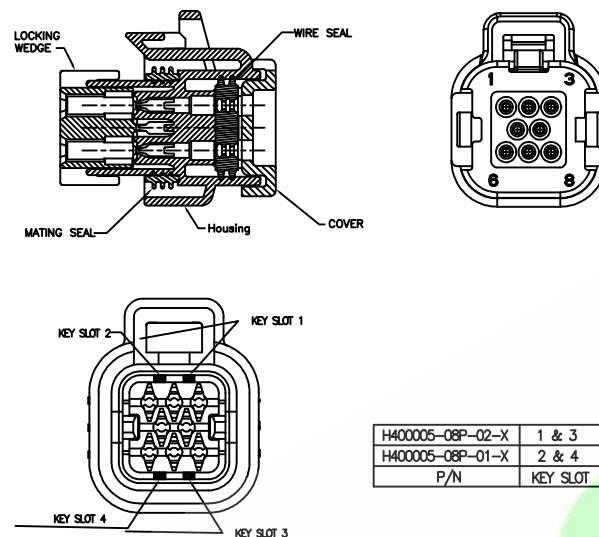


H400005-08P-02-X	1 & 3	Natural
H400005-08P-01-X	2 & 4	Black
P/N	KEY SLOT	Color

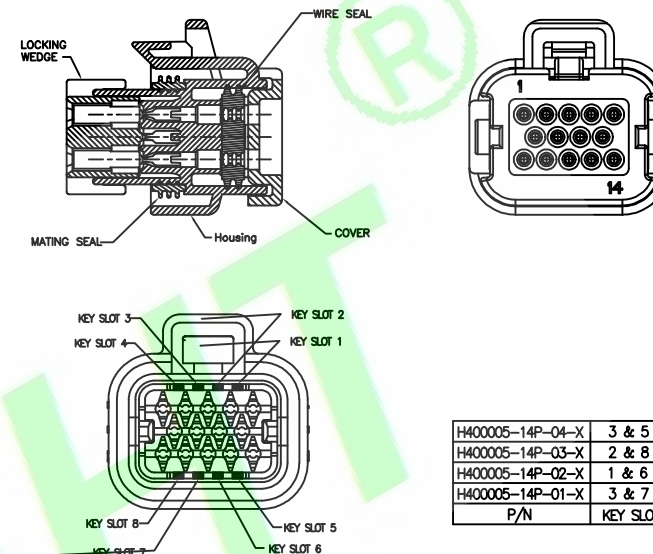

H400005-14P-04-X	3 & 5	Blue
H400005-14P-03-X	2 & 8	Gray
H400005-14P-02-X	1 & 6	Natural
H400005-14P-01-X	3 & 7	Black
P/N	KEY SLOT	Color

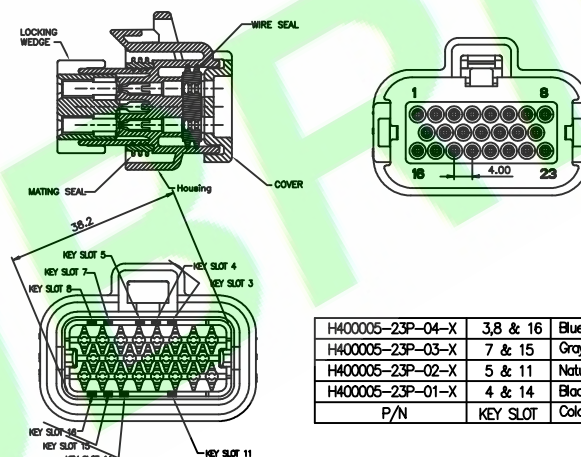

H400005-23P-04-X	3,8 & 16	Blue
H400005-23P-03-X	7 & 15	Gray
H400005-23P-02-X	5 & 11	Natural
H400005-23P-01-X	4 & 14	Black
P/N	KEY SLOT	Color

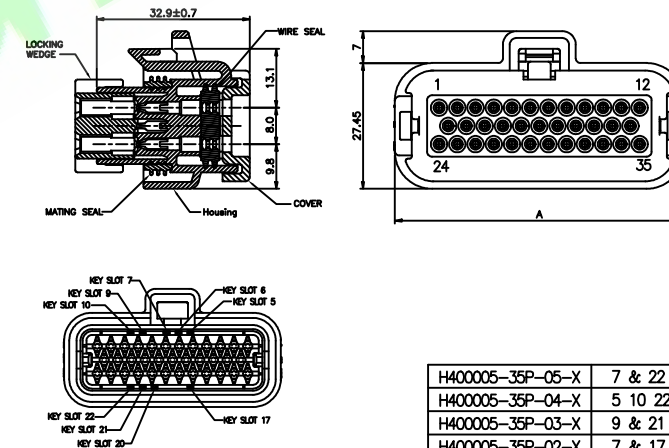

H400005-35P-05-X	7 & 22	Orange
H400005-35P-04-X	5 10 22	Blue
H400005-35P-03-X	9 & 21	Gray
H400005-35P-02-X	7 & 17	Natural
H400005-35P-01-X	6 & 20	Black
P/N	KEY SLOT	Color

3X	Update the color according to the actual situation	Judyyan	20251229
2X	UpdatUpdate code option	DENG	20230410
1X	ORIGINAL	Kenry	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Kenry
CHKD.: Tony
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.:	X': ±5.0°
X.X: ±0.35	X.X': ±3.0°
X.XX: ±0.25	X.XX': ±2.0°
X.XXX: ±0.15	X.XXX': ±1.0°

PART NO : H400005-XXP-XX-X

DWG. NO.:

TITLE :

4.0mm Pitch SEAL PLUG ASS

DATE: 10-Oct-2015

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4