

Specifications:
Material And Finish:
Material: Brass & Phosphor Bronze

Rating:
Current Rating: 7.0 Amp
Voltage Rating: 600V AC/DC
Operating Temperature Range: $-25^{\circ}\sim+85^{\circ}\text{C}$
Withstanding Voltage: 1500V AC/Minute


Electrical:
Contact resistance: 10m Ohm Max
Insulation Resistance: 1000M Ohm Min
Applicable Wire: AWG#20~#22

Ordering Information

H42012TF-XX

1 23 45

- 1: — Series No.
2: — T: Terminal
3: — F: Female
4: — P: Phosphor Bronze
B: Brass
5: — Q: Tin Plated
A: Gold Flash

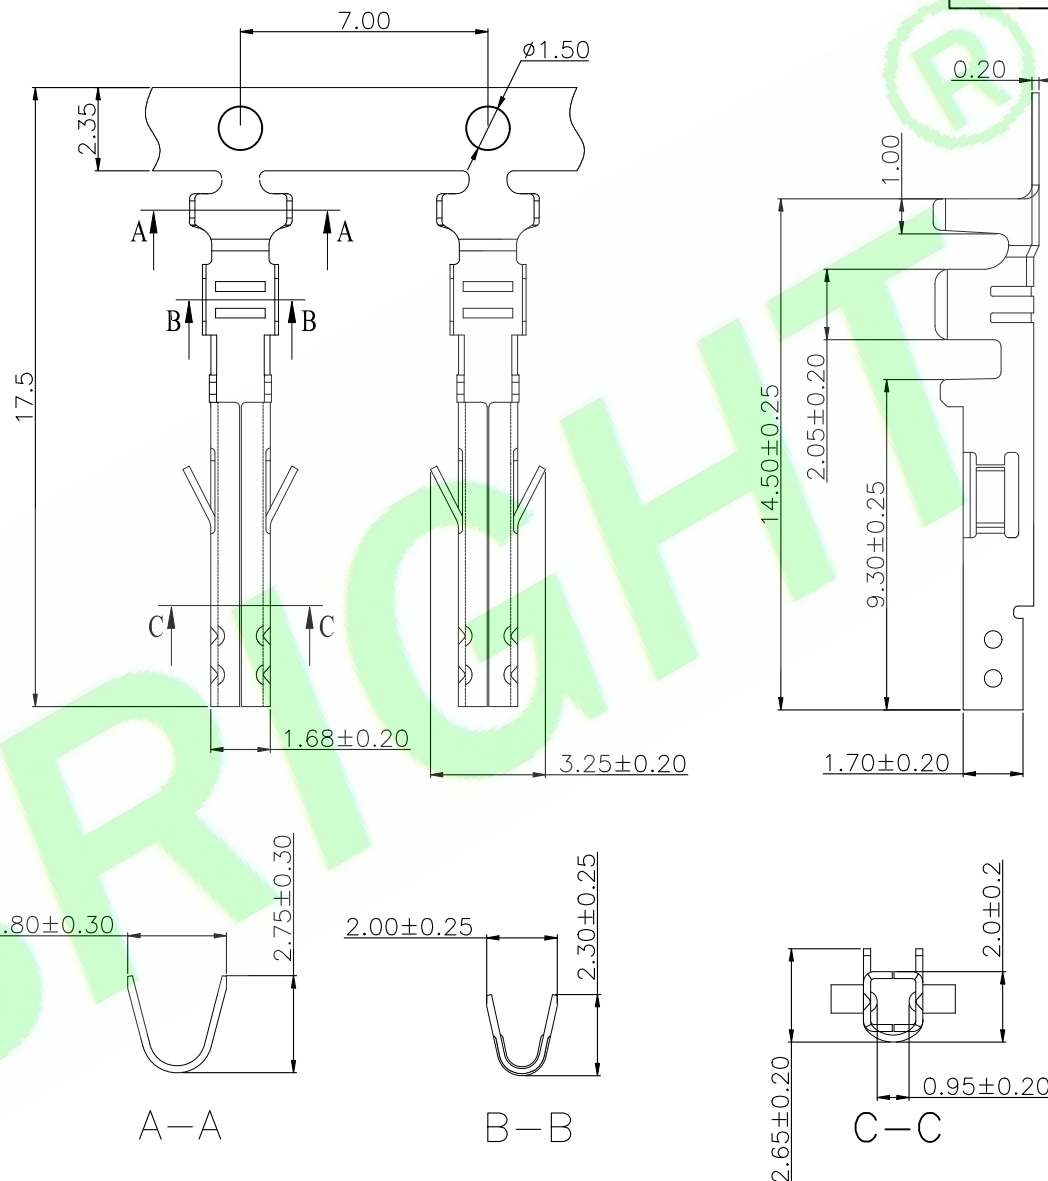

				DR.BY.: Kenry		GENERAL TOLERANCE:		PART NO : H42012TF-XX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED								
4X		Optimize drawing	Judyyan	20260605	CHKD.: Tony		LINEAR		ANGLES					DWG. NO.:				
3X		Update code options	Judyyan	20250401	APPD.: Billy		x.: x.x: ±0.38		x": ±5.0" x.x": ±3.0"		TITLE : 4.20mm Pitch Terminal		SHEET: 1/1				A4	
2X		按实物更新图纸	Judyyan	20230808			x.xx: ±0.25		x.xxx: ±0.10				x.x": ±2.0"					
1X		ORIGINAL	Kenry		x.xxx: ±0.10		x.x": ±2.0"		DATE: 22-Oct-2015		UNIT: mm		THIRD ANGLE PROJECTION					
		DESCRIPTION	DR.BY	ECN. NO														
1			2		3		4		5		6		7		8			