

RoHS Compliant

Specifications:

Wire Range:AWG#10~24

Contact:Phosphor Bronze/High
conductivity copper

Rating:

Voltage Rating:600V AC/DC

Operating Temperature Range:-45°~+105°C

Electrical:

Contact resistance:5m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:5000V AC/Minute

Ordering Information

H7501TF-XX-XX

1 2 3 4 5

1:—Series No.

2:—TF:Female Terminal

3:—B:Brass

G:High conductivity copper

4:—A:Gold Flash

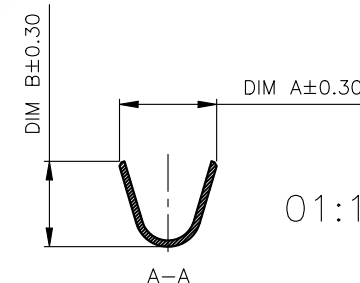
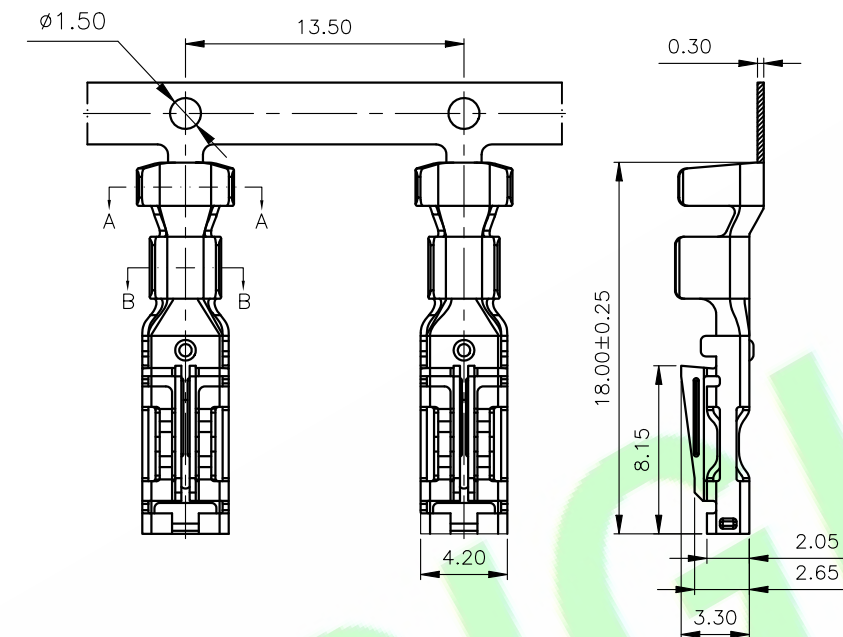
Q:Tin Plated

S:Matte Tin Plated

5:—01:10~12AWG

02:14~16AWG

03:22~24AWG

02:14~16AWG
03:22~24AWG

Ordering Information

Part NO	Wire range	DIM A	DIM B	DIM C	DIM D	MAT	Current Rating
01	#10~#12	5.30	5.25			Cu-ETP	32A
02	#14~#16	4.70	4.10	3.50	3.60	Brass	18A
03	#22~#24	3.40	2.00	2.80	2.20	Brass	10A

DR.BY.:

XIAO

GENERAL TOLERANCE:

LINEAR

ANGLES

CHKD.:

Judy्यान

APPD.:

Billy

PART NO : H7501TF-XX-XX

DWG. NO.:

TITLE :

7.50mm Pitch Crimp Style
Teriminal

DATE: 17-Dec-2025

HJBRIGHT®


東莞市華晶電子有限公司

BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

2X	Update code option	Judy्यान	20260530
1X	ORIGINAL	XIAO	
	DESCRIPTION	DR.BY	ECN. NO