

Specifications:

Material And Finish:

Insulator:PA46 UL94V-0

Contact:Copper alloy

Rating:

Current Rating:9.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+150°C

Electrical:

Contact resistance:5m Ohm Max


Insulator resistance:100M ohm min.

Ordering Information

M1270-02X-XX-BA





1 2 3 4 5 6

- 1: — Series No.
2: — No. of Positions
3: — Q: Tin Plated
S: Matte Tin Plated
H: Gold flash on contact;
Matte Tin on tail
4: — 01: A Type Red
02: B Type Green
03: C Type Blue
04: D Type Black
5: — B: 180 Degree
6: — A: In Bag




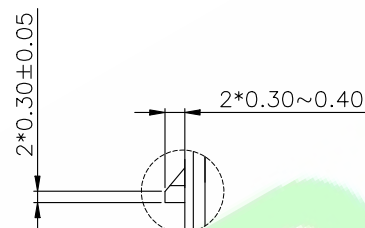


A view:3:1

with opening cable guide mounted
(state at time of supply)
contact marking

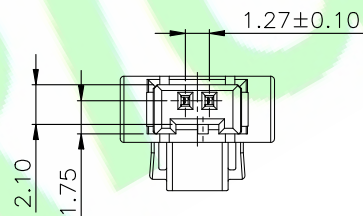

cable guide pressed on

A Type Red	B Type Green	C Type Blue	D Type Black
			
0.62	0.62	0.30	0.30

3X	New size added:A view	Judyyan	20260810
2X	Correction of operating temperature	Judyyan	20240305
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : M1270-02X-XX-BA
CHKD.: Aren	LINEAR	ANGLES	DWG. NO.:
APPD.: Billy	X.: ±0.30	X': ±5.0°	TITLE : MicroBridge Female cable Outlet 180 IDC Type 0.35MM2
	X.X: ±0.20	X.X': ±2.0°	DATE: 12-Nov-2021
	X.XXX: ±0.10	X.XXX': ±1.0°	

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4