

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PA46 UL94V-0

Contact:Copper alloy

Rating:

Current Rating:9.0 Amp


Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+150°C

Electrical:

Contact resistance:5m Ohm Max

Insulator resistance:100M ohm min.

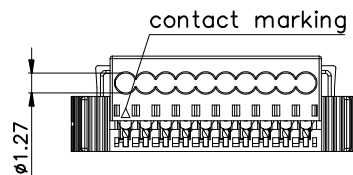with opening cable guide mounted
(state at time of supply)

Ordering Information

M1270-10X-XX-BA

1 2 3 4 5 6

1: — Series No.

2: — No. of Positions

3: — Q: Tin Plated

S: Matte Tin Plated

H: Gold flash on contact;

Matte Tin on tail

4: — 01: A Type Red

02: B Type Green


03: C Type Blue

04: D Type Black


5: — B: 180 Degree

6: — A: In Bag


A Type Red



B Type Green



C Type Blue



D Type Black



DR.BY.:

Zolin

GENERAL TOLERANCE:

LINEAR

ANGLES

CHKD.:

Aren

APPD.:

Billy

X.:

X': ±5.0°

X.X: ±0.30

X.X': ±3.0°

X.XX: ±0.20

X.XX': ±2.0°

X.XXX: ±0.10

X.XXX': ±1.0°

PART NO.: M1270-10X-XX-BA

DWG. NO.:

TITLE: MicroBridge Female cable Outlet
180 IDC Type 0.35MM2

DATE: 12-Nov-2021

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Zolin	
REV.	DESCRIPTION	DR.BY	ECN. NO.