

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PA46 UL94V-0

Contact:Copper alloy

Rating:

Current Rating:9.0 Amp





Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+150°C


Electrical:

Contact resistance:5m Ohm Max


Insulator resistance:100M ohm min.

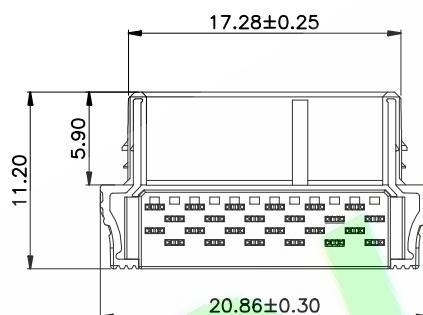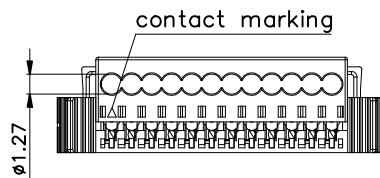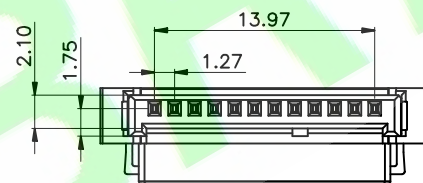with opening cable guide mounted
(state at time of supply)cable guide
pressed on


A Type Red




B Type Green



C Type Blue



D Type Black



Ordering Information

M1270-12X-XX-BA

1 2 3 4 5 6

1: — Series No.

2: — No. of Positions

3: — Q: Tin Plated

S: Matte Tin Plated

H: Gold flash on contact;

Matte Tin on tail

4: — 01: A Type Red

02: B Type Green

03: C Type Blue

04: D Type Black

5: — B: 180 Degree

6: — A: In Bag

1X	ORIGINAL	Zolin	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Zolin	GENERAL TOLERANCE:		PART NO : M1270-12X-XX-BA
	LINEAR	ANGLES	
CHKD.: Aren	X.: ±0.30	X°: ±5.0°	DWG. NO.:
	X.X: ±0.20	X.X°: ±3.0°	
APPD.: Billy	X.XX: ±0.10	X.XX°: ±2.0°	TITLE : MicroBridge Female cable Outlet 180 IDC Type 0.35MM2
	X.XXX: ±0.10	X.XXX°: ±1.0°	
			DATE: 12-Nov-2021

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITEDSHEET: 1/1
SCALE: 1:1
UNIT: mm

THIRD ANGLE PROJECTION

A4