

Specifications:

Material And Finish:

Insulator:PA46 UL94V-0

Rating:

Current Rating:12.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-55°~+150°C

Electrical:



Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:4000V AC/Minute

cover loose mounted

cover pressed on

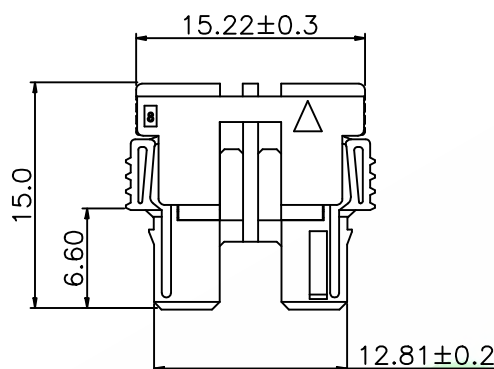

Ordering Information

M2540-02P-XX-A-01


1 2 3 4

1: — Series No.


2: — No. of Positions

3: — 01:A Type White
02:B Type Red
03:C Type Green
04:D Type Blue
05:E Type Black


4: — A:In Bag

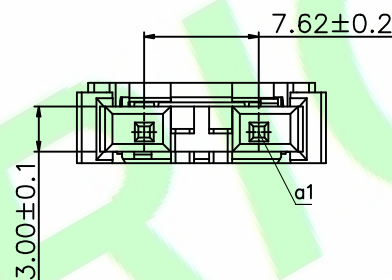


A type White




B type Red




C type Green



D type Blue



E type Black

DR.BY.:
Judyyan

GENERAL TOLERANCE:

LINEAR

ANGLES

PART NO : M2540-02P-XX-A-01

DWG. NO.:

TITLE : M2.54 SRC-A Housing 2P
Creepage distance>9.6mm

DATE: 30-Mar-2023

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

3X	Update Withstanding Voltage	Judyyan	20250530
2X	Update operating temperature	Judyyan	20240228
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.