

Specifications:

Material: Copper alloy

Wire Range: AWG#20~26

Operating Temperature Range: $-55^{\circ}\sim+150^{\circ}\text{C}$

A Reel 12,000 PCS

Ordering Information

M2540T-PXX

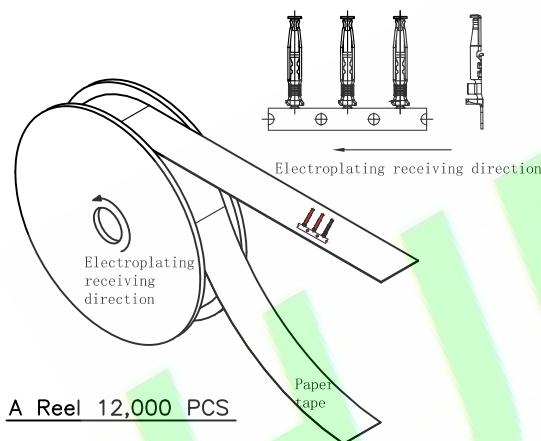
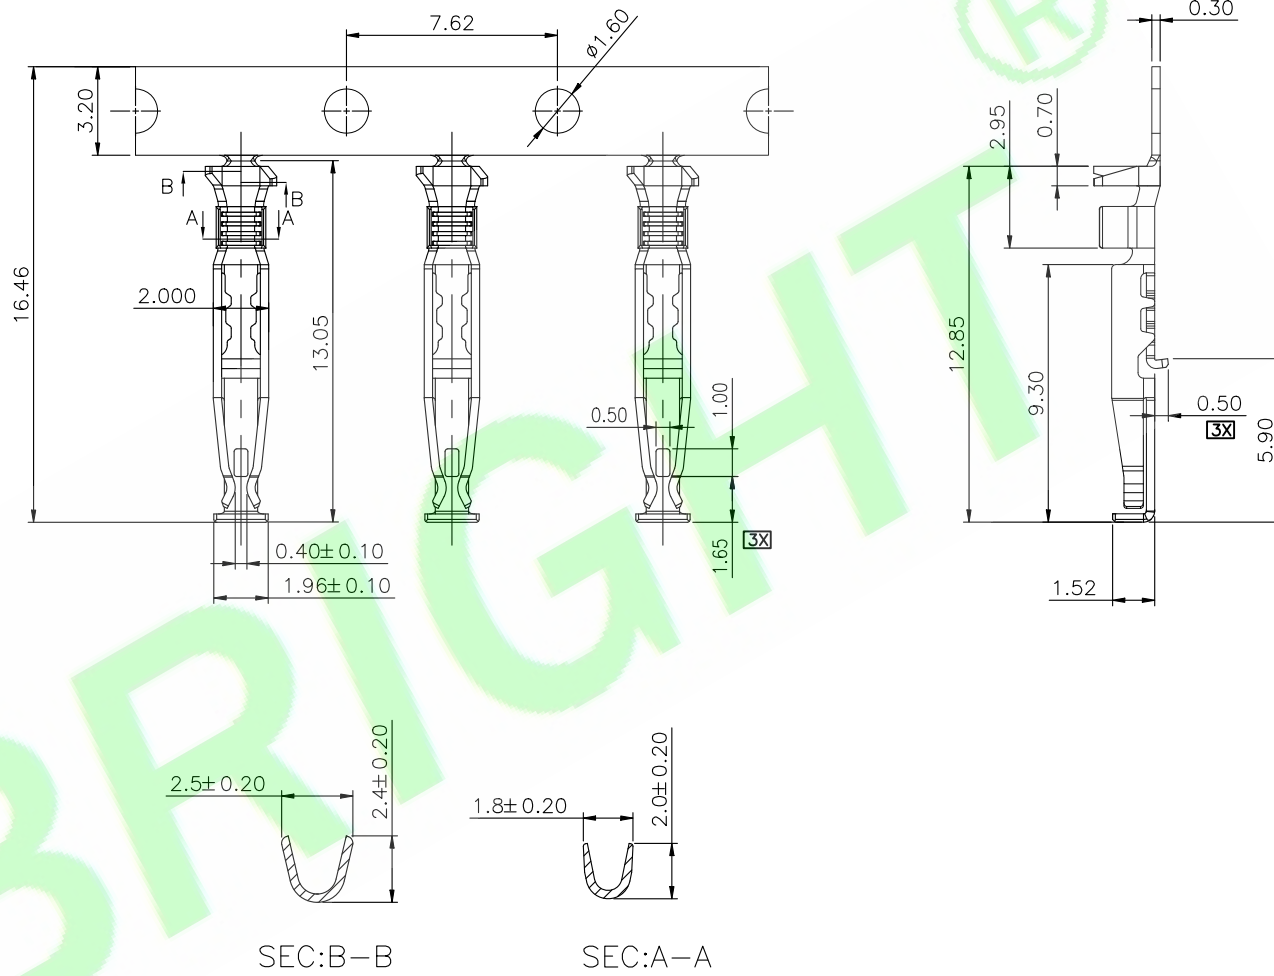
1 2 3


1: Series No.

2: T: Terminal

3: Plated:

Q: Tin Plated

H: Gold Flahs plated on contact Area,
Bright Tin plated on Solder AreaA1: Gold 5u" plated on contact Area,
Bright Tin plated on Solder AreaA2: Gold 30u" plated on contact Area,
Bright Tin plated on Solder Area

DR.BY.: Aaron				GENERAL TOLERANCE:		PART NO : M2540T-PXX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED							
CHKD.: Mike				LINEAR		ANGLES						DWG. NO.:			
APPD.: Billy				X.: ±		X°: ±6.0°		TITLE : 2.54 SRC-A Teriminal		SHEET: 1/1		 THIRD ANGLE PROJECTION		A4	
				X.X: ±0.25		X.X°: ±3.0°				SCALE: 1:1					
				X.XX: ±0.15		X.XX°: ±2.0°		DATE: 04-Jun-2021		UNIT: mm					
X.XXX: ±0.08				X.XXX°: ±2.0°											