


Contact:Brass

Operating Temperature Range: $-25^{\circ}\sim+85^{\circ}\text{C}$

Withstanding Voltage:1000V AC/Minute

1	2	3	4	5
---	---	---	---	---

- 1:— Series No.
- 2:— R:R/A Type
- 3:— No. of Positions
- 4:— A:Gold Flash
S:Matter Tin Plated
- 5:— B:In Tube
C:In Tray

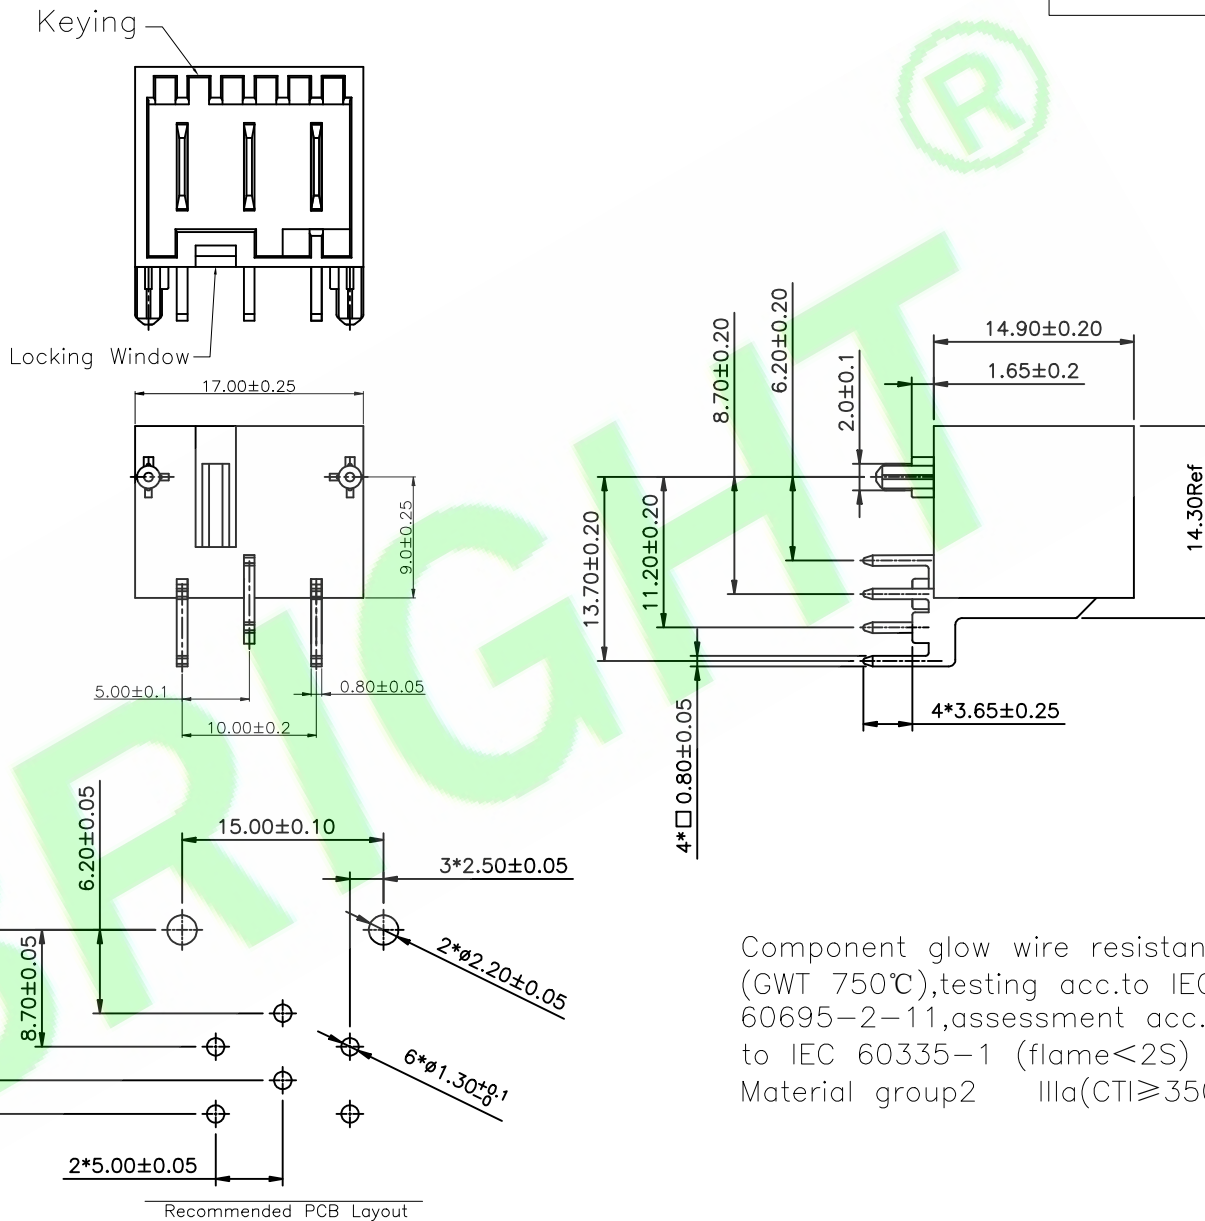

Component glow wire resistant
(GWT 750°C), testing acc.to IEC
60695-2-11, assessment acc.
to IEC 60335-1 (flame<2S)
Material group2 IIIa(CTI≥350)

				DR.BY.: Mark		GENERAL TOLERANCE:		PART NO : RAST5001R-03X-03-X		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED					
						LINEAR	ANGLES	DWG. NO.:							
2X		New anti-dork structure		Judyyan	20221207	CHKD.: Tony		x.: ±0.30	x': ±5.0°	TITLE : 5.0mm Pitch RASTER R/A Type		SHEET: 1/1			A4
1X		ORIGINAL		Mark		x.x: ±0.25		x.x': ±3.0°	SCALE: 1:1						
REV.		DESCRIPTION		DR.BY	ECN. NO.	APPD.: Billy		x.xx: ±0.15	x.xx': ±2.0°	DATE: 28-Aug-2021		UNIT: mm			
								x.xxx: ±0.10	x.xxx': ±1.0°						