


Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$


Withstanding Voltage:500V AC/Minute

[illegible]


M:Mylar In Tape&Reel



0:W/O Peg

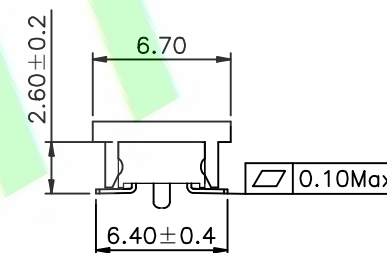

1:W/Peg

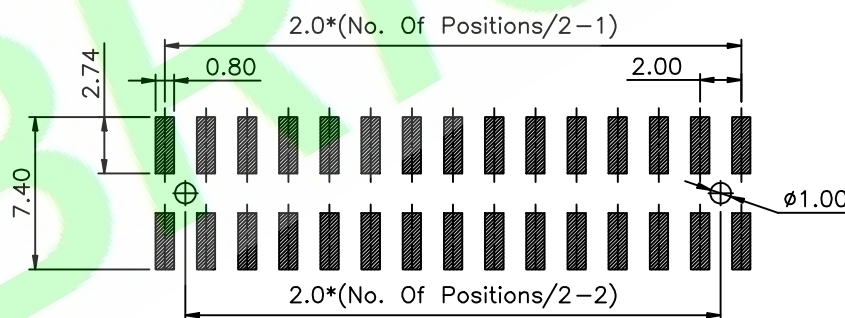

Recommended PCB Layout

				DR.BY.: Samson	GENERAL TOLERANCE: LINEAR ANGLES		PART NO : S20012M-XXX22A-XXX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
				CHKD.: Tony	x.: ±0.30 x°: ±5.0° x.x: ±0.20 x.x°: ±3.0°		DWG. NO.:				
				APPD.: Billy	x.xx: ±0.15 x.xxx: ±2.0° x.xxx: ±0.10 x.xxx°: ±1.0°		TITLE : 2.0mm Pitch Socket Header SMT Type				
2X	Update the layout of the PCB board		Judyyan	20250821					SHEET: 1/1		A4
1X	ORIGINAL		Samson						SCALE: 1:1		
REV.	DESCRIPTION		DR.BY	ECN. NO.				DATE: 5-Dec-2013	UNIT: mm		