

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

S25552S-XXX50-NX

1 2 3 4 5

1:— Series No.

2:— S: Straight Type

3:— No. of Positions

4:— A: Gold Flash

D: Gold 10u"

H: Selective Gold Plated


Q: Tin Plated

5:— A: In bag

B: In Tube

C: In Tray

F: W/Cap In Tape & Reel

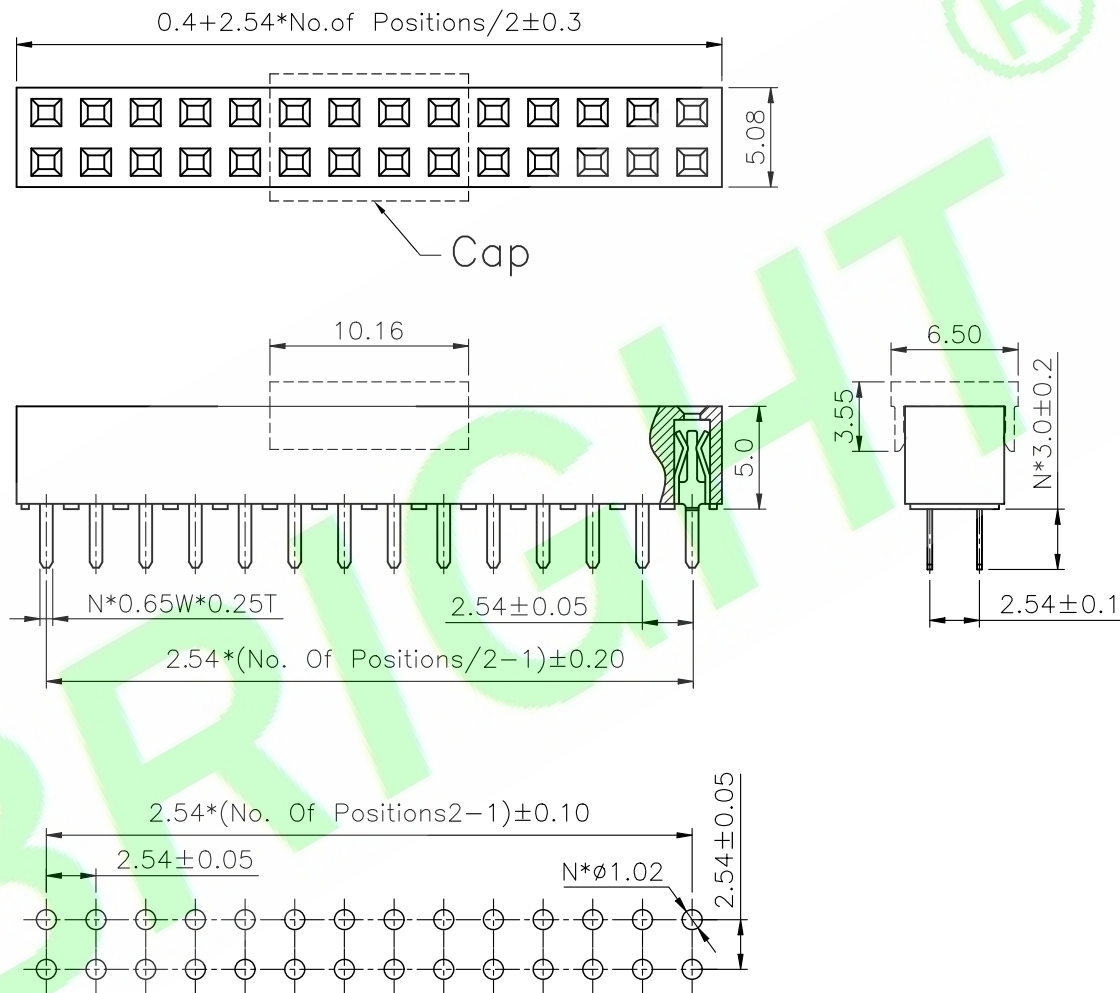

Recommended PCB Layout

2X	Add CAP option	Judyyan	20260506
1X	ORIGINAL	joy chen	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY: joy chen	GENERAL TOLERANCE:		PART NO : S25552S-XXX50-NX
	LINEAR	ANGLES	
CHKD.: Tony	X.: ±0.30	X': ±5.0°	DWG. NO.: RD0805-161
	X.X: ±0.20	X.X': ±3.0°	
APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°	TITLE : 2.54mm Pitch PCB Socket Header Straight Type
	X.XXX: ±0.10	X.XXX': ±1.0°	
			DATE: 15-Jul-2008

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4